

Photometric Test Report

Relevant Standards

- ☒ IES LM-79-2008
- ☒ ANSI C82.77:2017

Prepared For

RAB Lighting Inc.

Room 6A33, No.1388, Wuzhong road, Shanghai, China

Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF2111105

Report Number

DLF2111105-27a

Test Date

2021/11/9

Issue Date

2021/11/12

Prepared By



Wangzun Zhu

Approved By



Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v5.1

Outdoor - Pole/Arm-Mounted Area and Roadway Luminaires				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2008	1000		48560
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Standard 105	Premium 120	154.5
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		314.4
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77:2014	20.00%		5.72%
Power Factor (THD & PF - section 4.3)	ANSI C82.77:2014	0.9		0.917
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2008	7 step	5029±355	5080
		4 step	5029±220	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥70		85
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥-40		16
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		84
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		93
IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-18%≤IES Rcs,h1≤+23%		-12%
Zonal Lumen Requirement (0°-90°) (Goniophotometer - Section 4.2)	IES LM-79-2008	100%		100.00%
Zonal Lumen Requirement (80°-90°) (Goniophotometer - Section 4.2)	IES LM-79-2008	≤10%		0.48%
Input Voltage (V) (Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		480
Input Current (A) (Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		0.716

2.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2021/11/9	ALEDXL5T/480	AA1
2	Goniophotometer Test	2021/11/9	ALEDXL5T/480	AA1
3	THD and PF Test	2021/11/9	ALEDXL5T/480	AA1

Remark(If any)

- 1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.
- 2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.


3.0 Production Description

Luminaire Description: ALEDXL5T/480

Description: 345W/45,000 lm @ 5000K

Electrical Specification: 480V,50/60HZ

Photos of Luminaire Characteristics

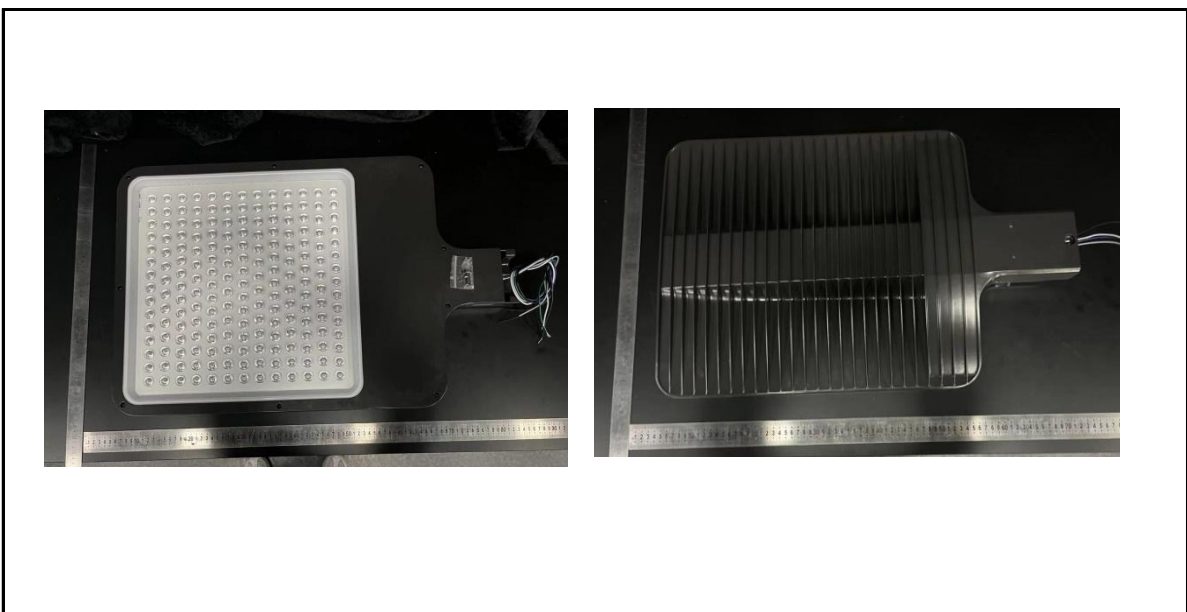

4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	ALEDXL5T/480	Sample ID.	AA1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Result

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
479.96	60	0.717	315.9	0.917


Test Result

CCT (K)	CRI	R9	Duv
5080	85	16	0.00079

Rf	Rg	IES Rcs,h1
84	93	-12%

4.1 Integrating Sphere Test

Results

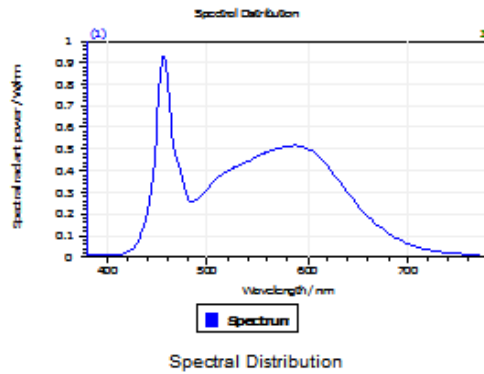


Spectral values

DominantWavelength 570.72 nm
Purity 0.084
PeakWavelength 456.52 nm
Radiant Power 102.6 W
Width50%:


Color Coordinates

Correlated Color Temporal 5080 K
x: 0.3430 u: 0.2101 u': 0.2101
y: 0.3515 v: 0.3229 v': 0.4843
CRI01 84.6 CRI09 16.4
CRI02 93.7 CRI10 83.2
CRI03 94.9 CRI11 80.6
CRI04 81.3 CRI12 62.5
CRI05 83.9 CRI13 87.9
CRI06 88.2 CRI14 98.0
CRI07 85.6 CRI15 79.9
CRI08 68.0 CRI16 75.0
ResultsCRI 85.0



PlanckDistance 7.9E-004

4.1 Integrating Sphere Test

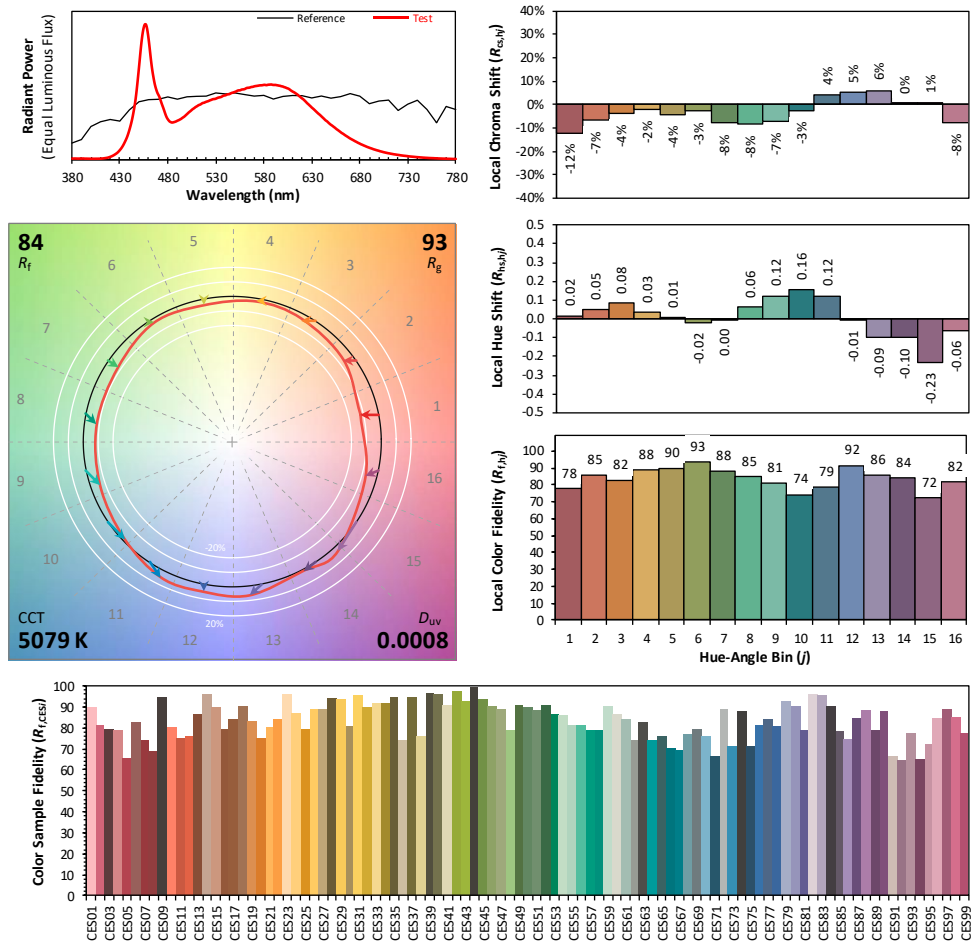

Notes: This is a recommended method for displaying ANSI/IES TM-30-18 information.

x 0.3430
 y 0.3515
 u' 0.2101
 v' 0.4843

CIE 13.3-1995
(CRI)

R_a 85
 R_g 15

Colors are for visual orientation purposes only. Created with the ANSI/IES TM-30-18 Calculator Version 2.0

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	ALEDXL5T/480	Sample ID.	AA1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	54.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WORST CASE	479.92	60	0.716	314.4	0.915


Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
48560	158.4	153.6	146.4	146.0	154.5


Zonal Lumen Requirement (0° - 90°)	Zonal Lumen Requirement (80° - 90°)	BUG rating
100.00%	0.48%	B5-U0-G4

4.2 Goniophotometer Test

Light Distrubtion Curve

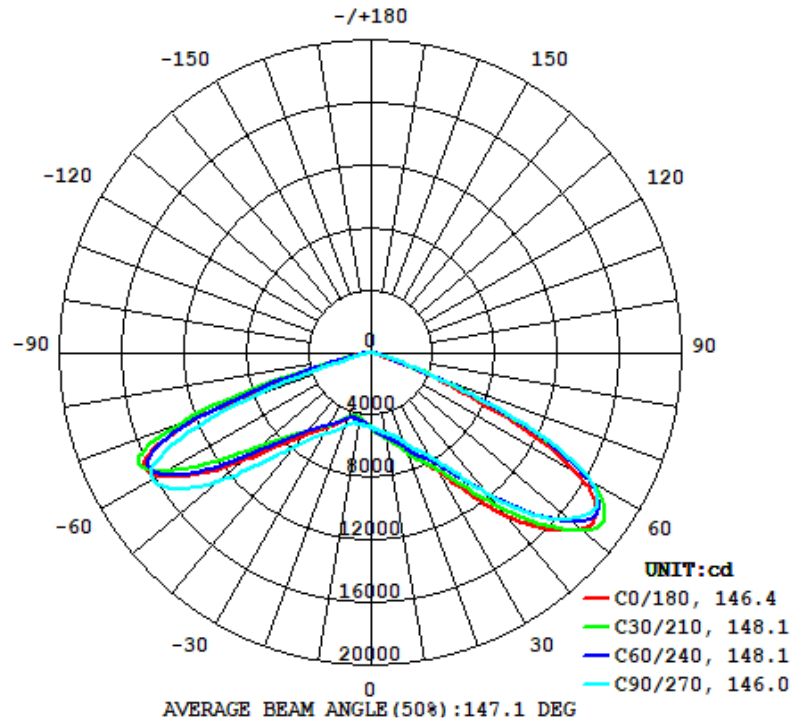

Isolux Plot

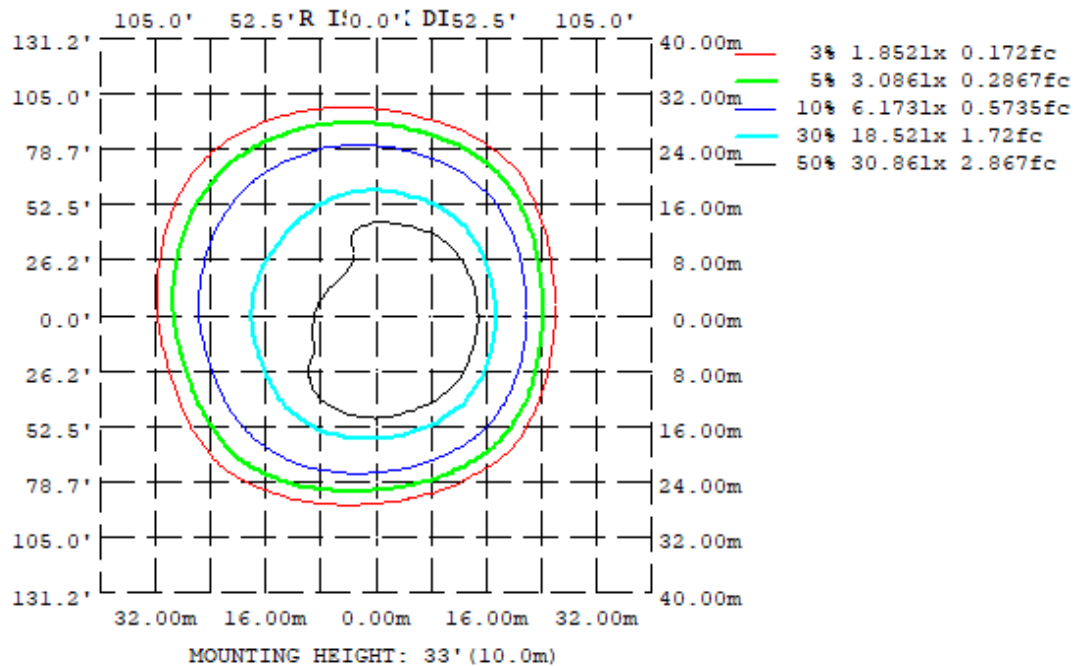

4.2 Goniophotometer Test


Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315
10	548.2	553.7	524.9	478.2	435.5	434.0	467.8	513.9
20	668.7	665.5	604.5	521.8	450.9	442.3	500.7	588.0
30	881.5	833.0	776.8	639.2	551.6	533.6	600.5	713.2
40	1365	1214	1184	811.2	701.4	644.3	791.8	982.1
50	1758	1757	1658	1248	1067	902.5	1277	1498
60	1515	1675	1625	1730	1583	1508	1622	1696
70	288.8	472.7	401.9	971.7	1088	1277	785.3	684.2
80	33.01	41.65	22.93	57.49	59.63	74.95	30.51	51.72
90	0	0	0	0	0	0	0	0
100	0	0	0	0	0	0	0	0
110	0	0	0	0	0	0	0	0
120	0	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0
150	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0
DEG	LUMINOUS INTENSITY: *10cd							

	Zonal (lm)		Total (lm)	Percent
0-10	465.85	0 - 10	465.85	0.96%
10-20	1473.49	0 - 20	1939.34	3.99%
20-30	2888.13	0 - 30	4827.47	9.94%
30-40	5101.30	0 - 40	9928.77	20.45%
40-50	9125.15	0 - 50	19053.92	39.24%
50-60	13955.39	0 - 60	33009.31	67.98%
60-70	12486.53	0 - 70	45495.84	93.69%
70-80	2828.60	0 - 80	48324.44	99.52%
80-90	235.41	0 - 90	48559.85	100.00%
90-100	0.00	0 - 100	48559.85	100.00%
100-110	0.00	0 - 110	48559.85	100.00%
110-120	0.00	0 - 120	48559.85	100.00%
120-130	0.00	0 - 130	48559.85	100.00%
130-140	0.00	0 - 140	48559.85	100.00%
140-150	0.00	0 - 150	48559.85	100.00%
150-160	0.00	0 - 160	48559.85	100.00%
160-170	0.00	0 - 170	48559.85	100.00%
170-180	0.00	0 - 180	48559.85	100.00%


4.2 Goniophotometer Test

LCS/BUG

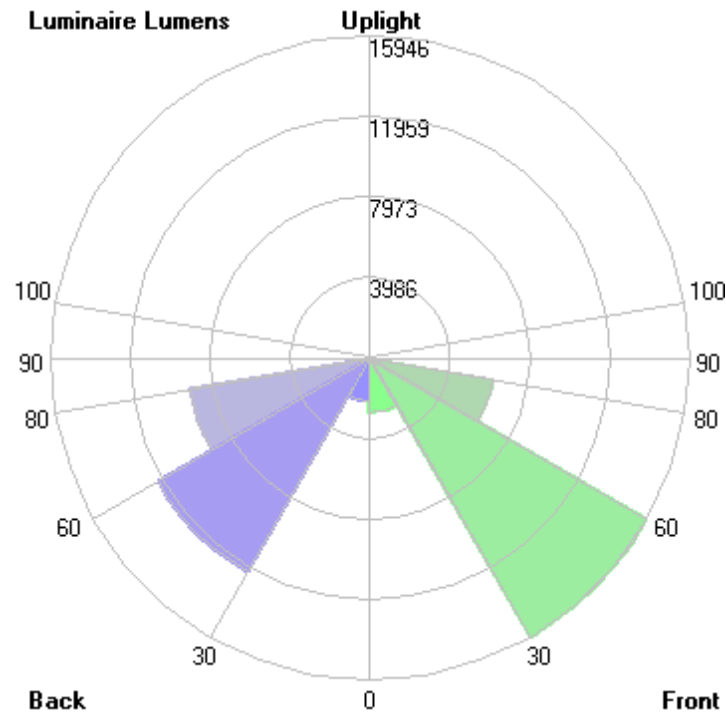


	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	2681.4	N.A.	5.5
FM - Front-Medium (30-60)	15945.5	N.A.	32.8
FH - Front-High (60-80)	6213.8	N.A.	12.8
FVH - Front-Very High (80-90)	85.6	N.A.	0.2
BL - Back-Low (0-30)	2146.0	N.A.	4.4
BM - Back-Medium (30-60)	12236.3	N.A.	25.2
BH - Back-High (60-80)	9101.3	N.A.	18.7
BVH - Back-Very High (80-90)	149.8	N.A.	0.3
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	48559.7	N.A.	100.0
BUG Rating	B5-U0-G4		

Coefficients of Utilization

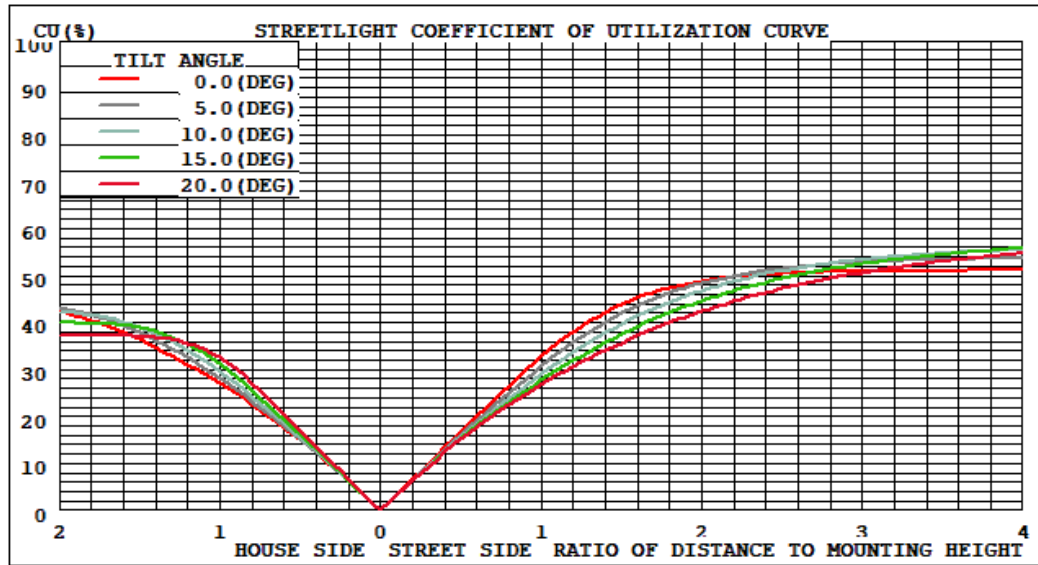

Isolines

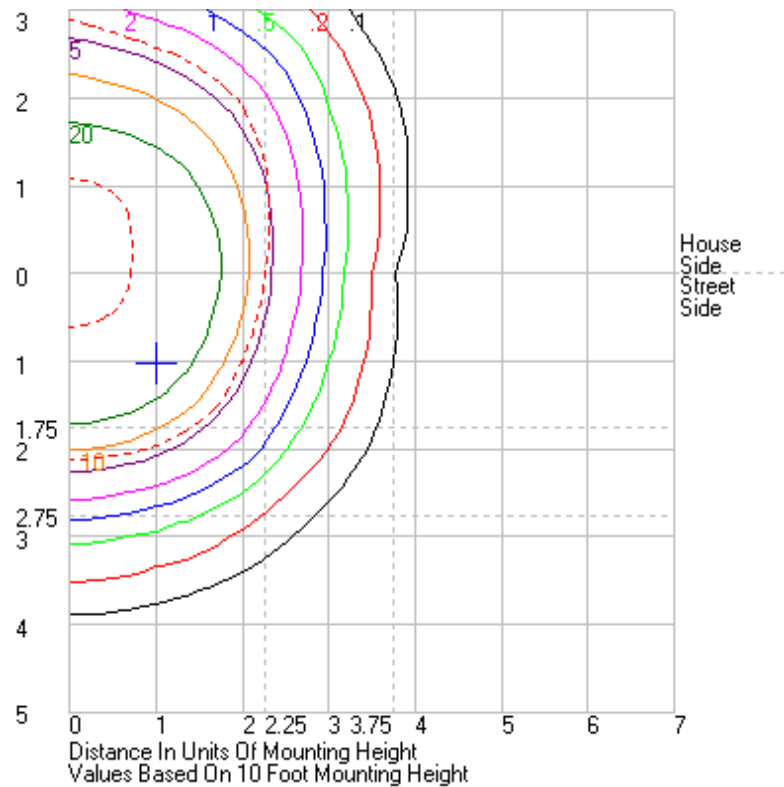

4.2 Goniophotometer Test

	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	285	300	315	330	345	360
0	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02	4842.02
1	4898.67	4899.84	4895.35	4888.52	4877.81	4862.64	4844.74	4825.14	4805.61	4784.91	4764.15	4746.88	4785.68	4775.28	4768.79	4767.23	4771.11	4777.56	4787.81	4798.68	4812.53	4823.61	4832.59	4841.14	4898.67
2	4957.78	4965.23	4965.57	4953.48	4935.74	4910.11	4878.34	4842.08	4805.69	4767.77	4731.7	4702.26	4732.16	4715.54	4706.97	4710.59	4724.66	4744.13	4768.46	4793.96	4821.07	4846.12	4870.17	4891.87	4957.78
3	5014.7	5030.72	5033.01	5020.69	4997.31	4963.15	4918.29	4865.95	4812.02	4756.37	4707.79	4662.91	4681.03	4658.81	4651.35	4661.6	4683.69	4714.26	4753.08	4792.6	4834.62	4873.73	4911.18	4942.27	5014.7
4	5075.75	5099.06	5101.89	5090.79	5063.59	5019.27	4960.72	4891.69	4824.3	4753.48	4680.73	4617.82	4621.93	4592.84	4592.01	4611.09	4642.84	4685.13	4737.76	4792.67	4851.11	4906.18	4952.64	4992.62	5075.75
5	5134.17	5163.8	5170.95	5162.86	5127.9	5074.74	5003.43	4921.33	4838.42	4744.88	4657.07	4578.9	4569.97	4532.63	4530.23	4557.65	4604.35	4660.55	4724.9	4796.03	4869.4	4938.52	4994.82	5042.78	5134.17
6	5198.08	5233.36	5245.87	5234.68	5198.21	5136.51	5054.1	4956.93	4856.44	4742.96	4636.87	4543.19	4522.44	4481.37	4476.05	4505.44	4564.8	4633.84	4712.09	4800.56	4891.55	4972.39	5039.88	5097.07	5198.08
7	5259.42	5304.78	5319.87	5307.28	5266.4	5200.86	5106.93	4997.64	4878.17	4747.16	4620.46	4512.32	4477.19	4428.79	4426.08	4457.1	4521.46	4607.18	4698.1	4803.97	4916.12	5008.45	5087.61	5154.03	5259.42
8	5329.23	5380.25	5397.72	5380.46	5336.66	5260.7	5154.52	5034.34	4904.03	4755.38	4606.25	4481.47	4432.16	4377.45	4378.35	4412.75	4481.41	4581.84	4685.33	4807.71	4936.57	5048.9	5138.69	5214.18	5329.23
9	5404.2	5460.72	5483.85	5458.05	5404.05	5322.35	5200.94	5067.53	4931.54	4767.04	4601.03	4453.84	4390.29	4335	4337.7	4372.92	4443.14	4559.03	4677.49	4817.16	4959.78	5092.49	5196.09	5281.41	5404.2
10	5481.94	5543.31	5567.01	5536.84	5472.4	5382.05	5248.62	5102.06	4955.44	4782.34	4597.95	4429.96	4354.7	4292.96	4304.94	4340.29	4415.13	4540.96	4677.73	4834.31	4986.16	5139.28	5258.63	5349.99	5481.94
11	5562.78	5630.57	5657.06	5617.5	5546.64	5444.39	5297.73	5139.6	4983.1	4804.51	4597.38	4416.97	4330.45	4264.39	4274.92	4314.05	4397.53	4524.01	4676.78	4853.29	5017.02	5188.71	5324.54	5422.95	5562.78
12	5647.27	5719.37	5750.18	5697.76	5620.66	5503.49	5347.35	5182.86	5015.61	4827.3	4602.18	4412.59	4313.71	4243.48	4250.69	4297.14	4383.31	4506.54	4674.8	4866.48	5051.08	5241.36	5393.62	5500.71	5647.27
13	5739.78	5819.05	5842.1	5783.95	5695.25	5561.57	5400.65	5231.34	5051.77	4847.46	4616.81	4415.62	4301.35	4227.55	4233.39	4287.12	4369	4496.24	4676.64	4882.08	5088.34	5297.37	5465.81	5583.8	5739.78
14	5838.95	5920.31	5938.9	5874.96	5772.55	5624.03	5458.49	5283.05	5096.51	4872.69	4638.44	4427.68	4298.84	4220.91	4224.03	4281.79	4359.62	4499.43	4692.85	4905.7	5126.95	5357.35	5542.45	5672.94	5838.95
15	5938.64	6025.97	6041.32	5968.81	5849.4	5690.85	5522.63	5337.09	5140.05	4911.06	4667.47	4449.41	4307.44	4225.93	4224.67	4281.26	4359.01	4515.14	4722.61	4937.91	5171.85	5420.68	5619.54	5769.31	5938.64
16	6049.96	6142.02	6150.04	6070.41	5934.69	5765.15	5600.59	5404.15	5194.27	4959.32	4705.32	4481.23	4327.4	4245.42	4233.84	4287.77	4367.66	4541.55	4764.18	4980.26	5225.26	5490.84	5705.12	5873.97	6049.96
17	6173.57	6265.58	6264.5	6176.06	6029.53	5850.15	5685.3	5477.02	5251.42	5012.57	4748.38	4522.5	4360.06	4277.06	4251.5	4307.5	4384.77	4578.47	4812.65	5030.6	5283.14	5566.04	5794.86	5992.33	6173.57
18	6317.96	6414.46	6401.47	6302.92	6138.54	5952.23	5779.76	5559.47	5315.31	5075.15	4800.92	4572.94	4400.79	4320.8	4285.51	4339.13	4412.76	4625.48	4871.45	5088.28	5349.16	5651.83	5905.4	6148.48	6317.96
19	6491.8	6598.84	6575.73	6463.73	6277.04	6086.54	5903.13	5661.16	5390.89	5142.54	4859.83	4628.59	4451.15	4371.94	4333.41	4378.29	4448.56	4679.15	4935.89	5156.53	5426.23	5755.72	6048.27	6326.44	6491.8
20	6687.21	6805.24	6780.52	6655.34	6440.92	6240.11	6045.03	5778.7	5476.58	5217.5	4928.95	4688.99	4509.5	4431.58	4390.64	4423.39	4494.52	4741.08	5007.41	5235.74	5519.08	5880.41	6205.46	6500.17	6687.21
21	6878.77	7001.86	6989.73	6868.98	6630.61	6414.08	6212.03	5934.3	5590.34	5306.25	5005.22	4761.03	4577.68	4499.5	4456.89	4480.54	4547.89	4810.34	5088.56	5325.44	5624.54	6019.89	6360.19	6673.85	6878.77
22	7060.16	7180.6	7175.3	7066.33	6822.22	6587.89	6378	6091.62	5728.2	5402.12	5093.88	4841.36	4651.1	4575.64	4530.73	4544.54	4612.7	4887.88	5182.49	5430.06	5743.5	6162.22	6476.39	6841.52	7060.16
23	7244	7355.66	7346.14	7237.83	7001.86	6764.4	6543.77	6244.72	5878.87	5530.38	5200.23	4936.15	4738.69	4659.02	4610.96	4619.11	4696.15	4977.05	5285.38	5545.4	5877.83	6307.1	6596.01	7000.65	7244
24	7423.61	7525.26	7507.17	7391.74	7155.77	6924.59	6707.87	6406.74	6030.26	5678.08	5325.64	5047.31	4836.89	4751.01	4702.53	4709.01	4786.68	5074.61	5393.17	5663.34	6009.72	6435.96	6783.78	7158.44	7423.61
25	7599.76	7697.16	7665.16	7527.81	7294.76	7071.94	6855.86	6545.98	6168.63	5829.08	5465.05	5170.17	4944.02	4856.26	4813.09	4811.94	4883.99	5174.92	5499.87	5783.59	6140.1	6553.83	6918.65	7312.11	7599.76
26	7794.54	7882.89	7822.88	7661.04	7427.1	7227.42	7012.02	6689.02	6304.51	5969.77	5607.04	5300.89	5061.73	4970.5	4929.38	4920.18	4985.45	5269.35	5604.71	5902.4	6262.81	6671.66	7047.97	7472.76	7794.54
27	8013.58	8087.1	7987.31	7795.78	7567.35	7386.09	7178.02	6832.26	6431.98	6091.07	5740.38	5420.84	5190.12	5093.16	5047.18	5028.94	5080.79	5359.76	5706.53	6015.69	6374.84	6781.91	7187.17	7654.65	8013.58
28	8248.07	8305.93	8176.97	7949.06	7714.14	7553.57	7353.66	6985.21	6556.78	6199.13	5846.53	5526.96	5308.32	5212	5169.6	5136.85	5170.16	5447.22	5809.03	6119.12	6472.93	6886.84	7339.81	7854.66	8248.07
29	8509.33	8561.91	8388.84	8122.88	7878.43	7736.44	7550.06	7153.46	6682.53	6299.35	5933.93	5610.76	5416.88	5321.09	5286.41	5239.66	5259.56	5540.32	5909.24	6219.76	6552.92	7003.45	7512.4	8085.71	8509.33
30	8815.39	8854.3	8634.72	8330.37	8071.4	7947.84	7767.85	7339.69	6817.33	6391.68	6014.32	5688	5515.88	5426.45	5391.74	5336.17	5345.84	5633.19	6004.91	6318.14	6632.92	7131.65	7705.27	8347.84	8815.39
31	9153.68	9184.44	8918.83	8565.29	8299.4	8186.22	8011.53	7549.34	6964.55	6483.39	6085.78	5769.43	5610.7	5519.9	5486.13	5423.42	5432.56	5727.98	6111.77	6421.47	6730	7274.77	7923.86	8645.15	9153.68
32	9544.96	9562.24	9248.34	8848.61	8564.21	8463.99	8285.04	7777.98	7130.68	6593.13	6164.08	5859.74	5715.47	5618.4	5573.38	5503.24	5522.98	5832.5	6231.05	6526.36	6858.41	7444.33	8164.07	8991	9544.96
33	9988.05	9980.46	9605.72	9159.53	8860.68	8776.78	8590.24	8043.46	7323.28	6715.68	6251.58	5960.48	5832.3	5727.25	5660.67	5581.82	5615.3	5951.66	6372.67	6632.16	7006.04	7638.42	8449.07	9396.48	9988.05
34	10466.3	10438	9988.43	9497.21	9195.57	9123.81	8918.17	8321.77	7532.73	6858.48	6357.47	6072.52	5962.6	5846.04	5758.69	5671.16	5720.14	6086.43	6522.43	6800.25	7177.32	7852.43	8767.02	9853.41	10466.3
35	10964.9	10927.1	10425.4	9872.68	9560.48	9514.83	9297.89	8632.01	7768.98	7024.76	6478.6	6202.62	6104.51	5975.91	5869.77	5771.76	5839.99	6239.75	6672.69	6977.66	7374.52	8096	9130.96	10348.8	10964.9
36	11503.3	11447.7	10869.8	10270.7	9944.22	9933.67	9733.51	8985.23	8026.2	7197.51	6614.75	6350.28	6265.89	6120.79	5991.15	5886.58	5972.46	6412.03	6857.55	7187.26	7594.05	8381.11	9537.74	10877	11503.3
37	12067	11986.1	11349.6	10699.6	10376.1	10389	10211.1	9373.84	8307.03	7401.51	6769.67	6519.92	6435.36	6283.14	6123.45	6009.1	6119.88	6584.31	7084.4	7419.15	7842.01	8696.85	9981.42	11428.1	12067
38	12606.1	12525.7	11857.7	11158.4	10823.2	10888.1	10735.7	9848.49	8617.73	7612.96	6941.45	6707.21	6604.82	6484.14	6268.38										

Page 13 of 17

Page 14 of 17

161	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
162	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
163	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
164	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
165	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
166	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
167	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
168	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
169	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
171	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
172	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
173	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
174	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
175	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
176	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
177	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
178	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
179	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	ALEDXL5T/480	Sample ID.	AA1
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the ANSI C82.77:2002.

The total harmonic distortion shall be measured to the 40th order.

The ambient temperature condition was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
479.96	60	0.717	315.9	0.917	5.72%

5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2020/12/26	2021/12/25
DLF108	Auxiliary Lamp	2020/12/26	2021/12/25
DLF122	Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-derectional	2020/12/26	2021/12/25
DLF116	AC Power Source	2020/12/26	2021/12/25
DLF113	Power Meter	2020/12/26	2021/12/25
DLF112	Temperature Recorder	2020/12/26	2021/12/25
DLF114	Temperature & Humidity Datalogger	2020/12/26	2021/12/25
DLF101	Goniophotometer	2020/12/26	2021/12/25
DLF125	Standard Lamp Standard Lamp Type: 76.58 V, 6.7875 A, Tungsten, Omni-derectional	2020/12/26	2021/12/25
DLF104	AC Power Source	2020/12/26	2021/12/25
DLF507	DC Power Source	2020/12/26	2021/12/25
DLF102	Power Meter	2020/12/26	2021/12/25
DLF111	Temperature & Humidity Datalogger	2020/12/26	2021/12/25
DLF119	Power Meter	2020/12/26	2021/12/25
DLF031	Temperature data logger	2020/12/26	2021/12/25
DLF022	Digital power meter	2020/12/26	2021/12/25
DLF003	Temperature & Humidity Datalogger	2020/12/26	2021/12/25

***** End of Test Report*****