



Photometric Test Report

Relevant Standards

- ☒ IES LM-79-2019
- ☒ ANSI C82.77-10:2014

Prepared For

RAB Lighting Inc.

408 W 14th St, New York, NY 10014 United States

Xiao Xiang, 15921313292, Gary.Xiao@rablighting.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF2509110

Report Number

DLF2509110-30a

Test Date

2025/9/24

Issue Date

2025/9/27

Test By

Hengshan Li

Hengshan Li

Prepared By

Wangzun Zhu

Wangzun Zhu

Approved By

Kevin Jia

Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v5.1

Indoor - Linear Ambient - Linear Ambient Luminaires (Indirect Component)				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2019	1000		2699
Lumen/ft (Goniophotometer - Section 4.2)	IES LM-79-2019	≥500		1349
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2019	Standard 115	Premium 130	132.3
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2019	Wrosted Case		20.4
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77-10: 2014	20.00%	120V	2.73%
		20.00%	277V	6.83%
Power Factor (THD & PF - section 4.3)	ANSI C82.77-10: 2014	0.9	120V	0.996
		0.9	277V	0.926
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2019	7 step	3045±175	3002
		4 step	3045±100	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2019 CIE 13.3-1995	≥80		93
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2019 CIE 13.3-1995	≥0		59
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		91
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		100
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-12%≤IES Rcs,h1≤+23%		-5%
Zonal Lumen Requirement (90°-150°) (Goniophotometer - Section 4.2)	IES LM-79-2019	≥35%		33.97%
Corrected UGR (X=4H, Y=8H, 70/50/20%) (Goniophotometer - Section 4.2)	CIE 190-2010	<22		24.4
Input Voltage (V)				
(Goniophotometer - Section 4.2)	IES LM-79-2019	Worst Case		277
(Goniophotometer - Section 4.2)		Non-Worst Case		120
Input Current (A)				
(Goniophotometer - Section 4.2)	IES LM-79-2019	Worst Case		0.080
(Goniophotometer - Section 4.2)		Non-Worst Case		0.169
Power (Input Wattage - W)				
(Goniophotometer - Section 4.2)	IES LM-79-2019	Worst Case		20.4
(Goniophotometer - Section 4.2)		Non-Worst Case		20.2

2.0 Test List

Test Item	Test	Test Date	Model Number	Build Level	Sample No.
1	Integrating Sphere Test	2025/9/24	BOAE2PU @ 20W/3000K/50%/50%	N/A	DLF2509110-AD1
2	Goniophotometer Test	2025/9/24	BOAE2PU @ 20W/3000K/50%/50%	N/A	DLF2509110-AD1
3	THD and PF Test	2025/9/24	BOAE2PU @ 20W/3000K/50%/50%	N/A	DLF2509110-AD1

Remark(If any)

1. This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.

2. The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

3.0 DUT Description

Model Number: BOAE2PU @ 20W/3000K/50%/50%

Electrical Rating: 120V-277V,50/60HZ

Received Date: 2025/9/22

Photos of Luminaire Characteristics



4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	BOAE2PU @ 20W/3000K/50%/50%	Sample ID.	DLF2509110-AD1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.2	Humidity (%RH)	55.2

Test Method

The samples were tested according to the IES LM-79-2019.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature and relative humidity condition inside the sphere was maintained at 25° C ± 1.2° C and 10% - 65% RH.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Result



Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
120.01	60	0.169	20.2	0.996
277.02	60	0.080	20.4	0.926

Test Result

CCT (K)	CRI	R9	Duv
3002	93	59	0.0002

Rf	Rg	IES Rcs,h1
91	100	-5%

4.1 Integrating Sphere Test

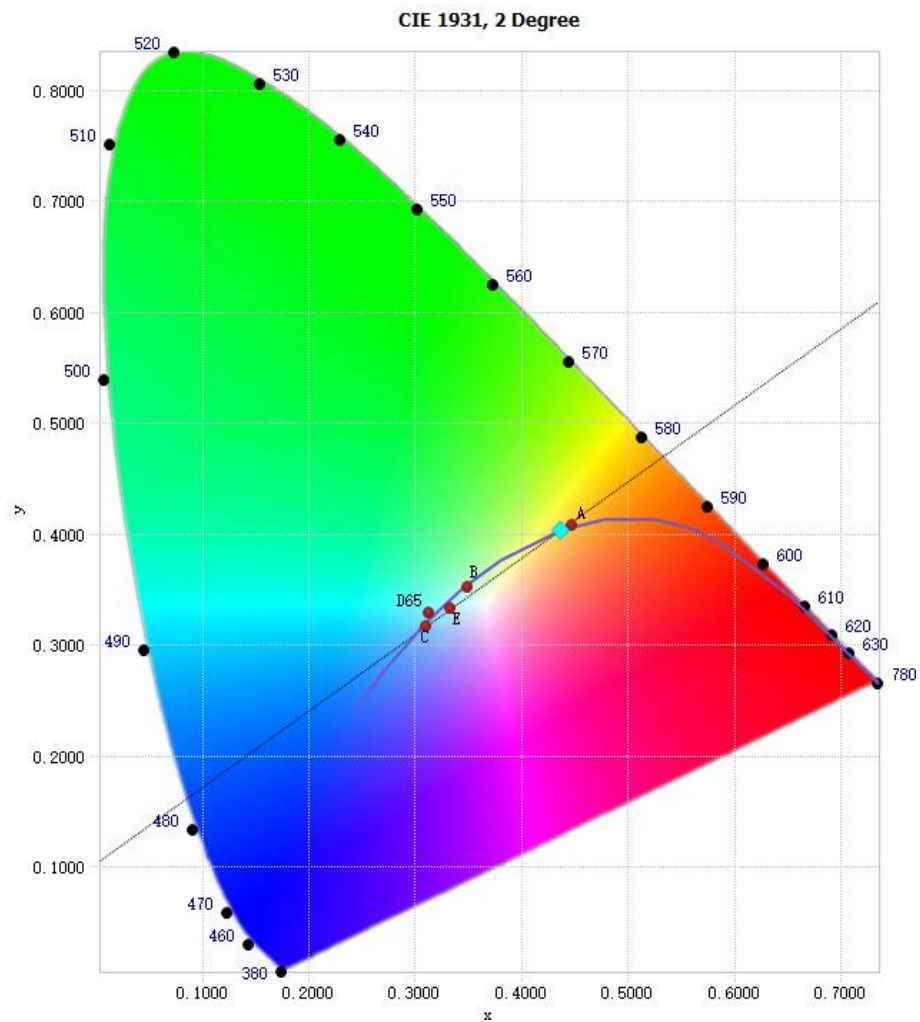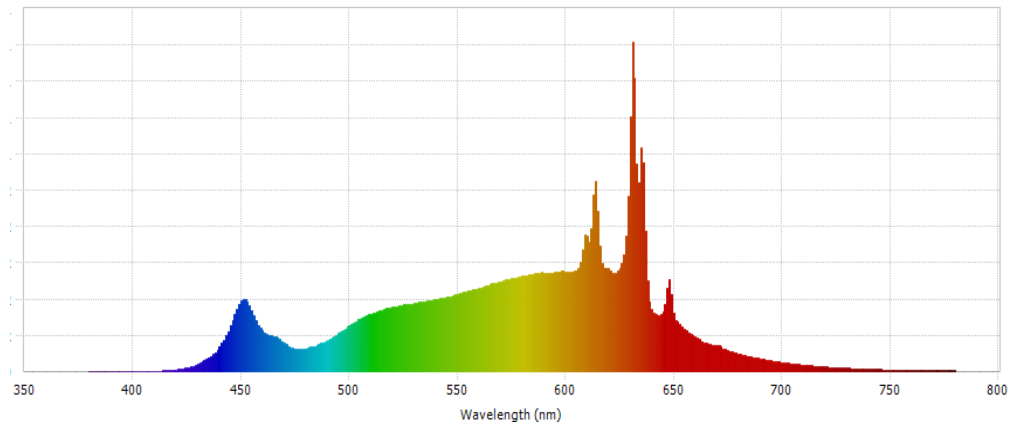

4.1 Integrating Sphere Test


IES TM-30-18 Color Rendition Report

Source: DLF2509110-30a

Manufacturer: RAB Lighting Inc.

Date: 2025/9/24

Model: BOAE2PU @ 20W/3000K/50%/50%

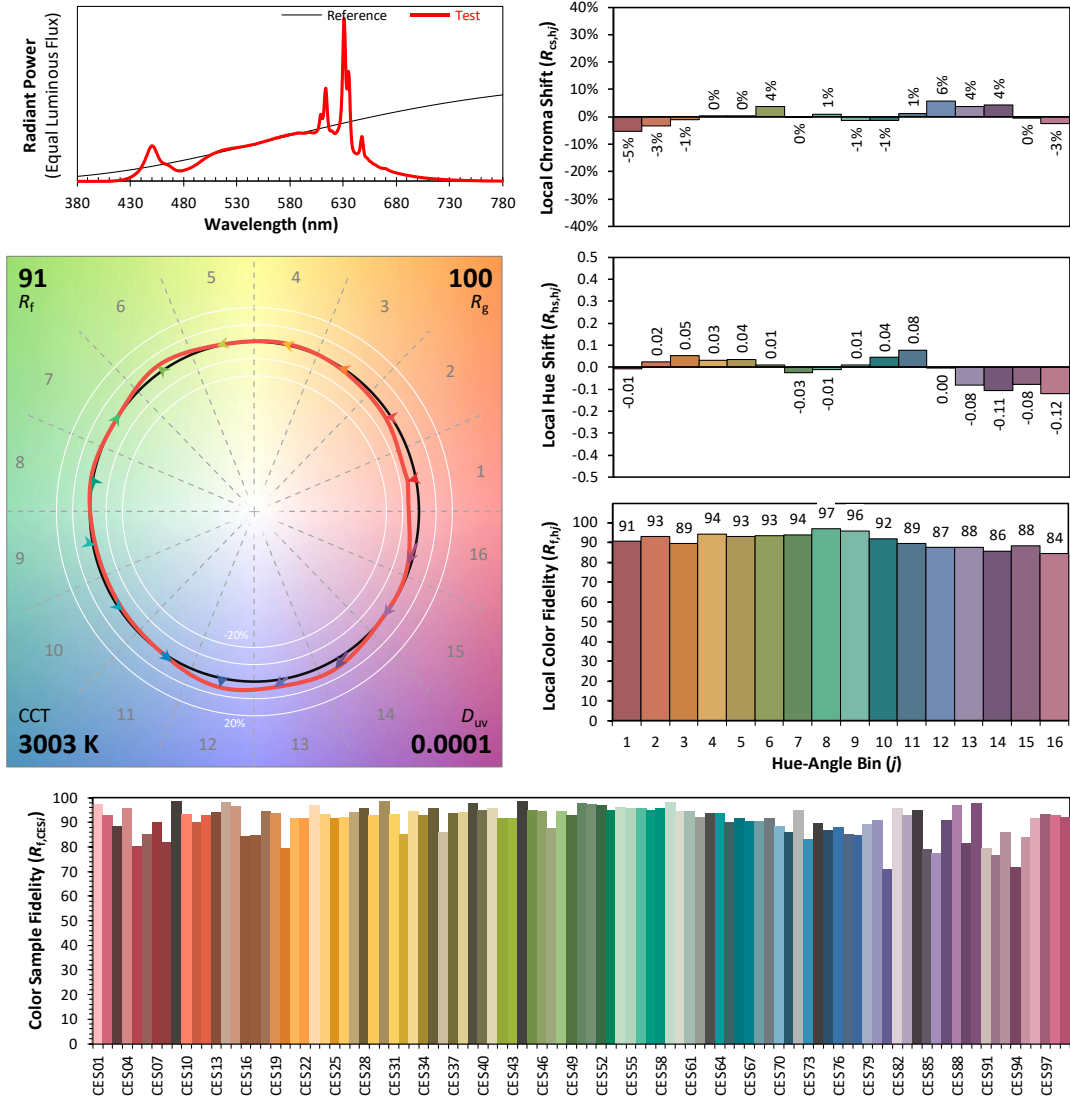

Notes: This is a recommended method for displaying IES TM-30-18 information.

x 0.4369
 y 0.4044
 u' 0.2504
 v' 0.5215

CIE 13.3-1995
(CRI)

R_a 94
 R_9 61

4.1 Integrating Sphere Test

Spectral Distribution over Visible Wavelength							
WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)
380	-2.41E-06	485	1.17E-02	590	4.45E-02	695	4.82E-03
385	1.31E-05	490	1.41E-02	595	4.45E-02	700	4.01E-03
390	2.32E-05	495	1.74E-02	600	4.50E-02	705	3.42E-03
395	3.86E-05	500	2.10E-02	605	4.56E-02	710	2.88E-03
400	6.53E-05	505	2.38E-02	610	6.05E-02	715	2.38E-03
405	6.83E-05	510	2.62E-02	615	7.15E-02	720	2.05E-03
410	1.67E-04	515	2.81E-02	620	4.63E-02	725	1.73E-03
415	4.30E-04	520	2.94E-02	625	4.67E-02	730	1.45E-03
420	9.02E-04	525	3.04E-02	630	1.16E-01	735	1.25E-03
425	1.87E-03	530	3.12E-02	635	1.01E-01	740	1.05E-03
430	3.61E-03	535	3.18E-02	640	2.80E-02	745	8.43E-04
435	6.71E-03	540	3.28E-02	645	2.69E-02	750	7.21E-04
440	1.23E-02	545	3.38E-02	650	2.62E-02	755	6.31E-04
445	2.24E-02	550	3.49E-02	655	1.88E-02	760	5.19E-04
450	3.26E-02	555	3.64E-02	660	1.54E-02	765	4.16E-04
455	2.59E-02	560	3.77E-02	665	1.27E-02	770	3.73E-04
460	1.75E-02	565	3.93E-02	670	1.18E-02	775	3.07E-04
465	1.52E-02	570	4.05E-02	675	9.40E-03	780	2.92E-04
470	1.22E-02	575	4.18E-02	680	7.87E-03		
475	9.75E-03	580	4.30E-02	685	6.67E-03		
480	1.01E-02	585	4.39E-02	690	5.65E-03		

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	BOAE2PU @ 20W/3000K/50%/50%	Sample ID.	DLF2509110-AD1
Opreate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.1	Humidity (%RH)	55.0

Test Method

The samples were tested according to the IES LM-79-2019.

Photometric paramters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at 25° C ± 1.2° C and 10% - 65% RH, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.

Airflow for the instantaneous tangential velocity of any point on the DUT shall be less than an upper tolerance limit of 0.20 m/s.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WORST CASE	277.02	60	0.080	20.4	0.926
NON-WORST CASE	120.00	60	0.169	20.2	0.996


Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
2699	360.0	360.0	360.0	360.0	132.3


Zonal Lumen Requirement (90°-150°)	UGR (X=4H, Y=8H, 70/50/20%)	Length(ft)	Lumen/ft
33.97%	24.4	2	1349

4.2 Goniophotometer Test

Light Distrubtion Curve

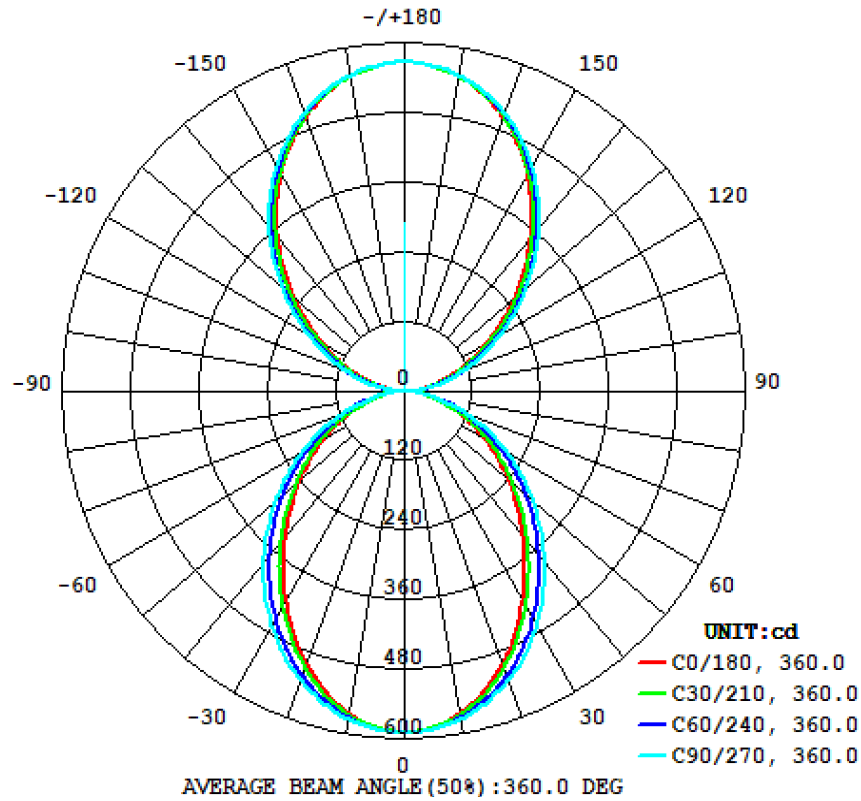

Isolux Plot

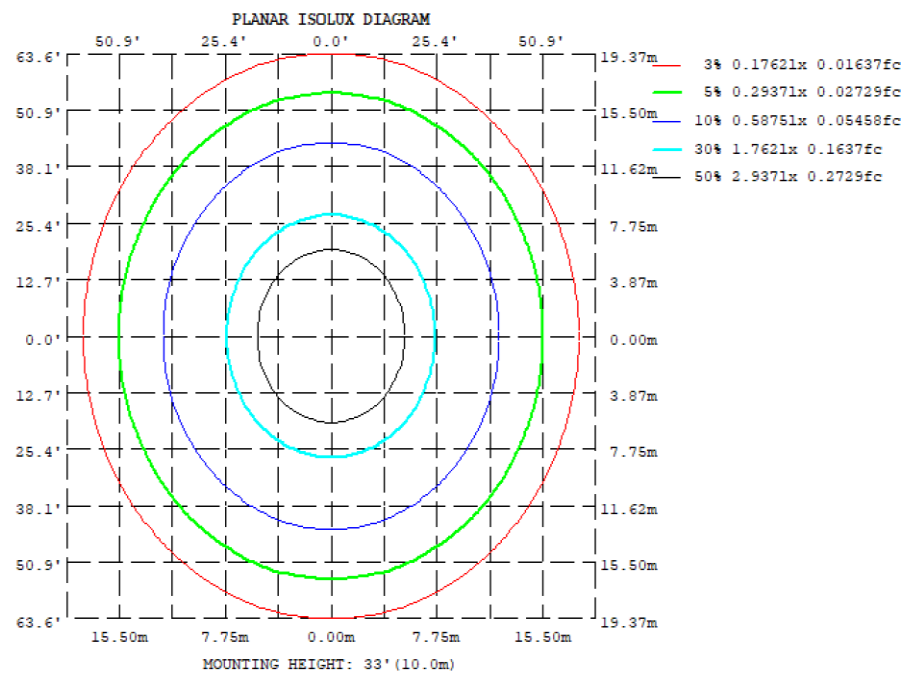

4.2 Goniophotometer Test

Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315
10	564.5	568.8	573.6	568.8	564.5	568.8	573.6	568.8
20	502.6	516.4	531.9	516.4	502.6	516.4	531.9	516.4
30	417.0	440.6	467.1	440.6	417.0	440.6	467.1	440.6
40	325.3	352.7	385.7	352.7	325.3	352.7	385.7	352.7
50	240.5	264.6	296.8	264.6	240.5	264.6	296.8	264.6
60	164.2	182.6	206.1	182.6	164.2	182.6	206.1	182.6
70	94.97	106.2	119.8	106.2	94.97	106.2	119.8	106.2
80	35.77	39.11	42.34	39.11	35.77	39.11	42.34	39.11
90	0	0	0	0	0	0	0	0
100	29.96	35.11	38.52	35.11	29.96	35.11	38.52	35.11
110	91.84	102.0	111.7	102.0	91.84	102.0	111.7	102.0
120	167.7	181.2	194.8	181.2	167.7	181.2	194.8	181.2
130	253.8	268.2	282.1	268.2	253.8	268.2	282.1	268.2
140	346.1	358.3	369.5	358.3	346.1	358.3	369.5	358.3
150	434.4	442.2	449.7	442.2	434.4	442.2	449.7	442.2
160	506.2	510.0	513.4	510.0	506.2	510.0	513.4	510.0
170	552.4	553.4	554.2	553.4	552.4	553.4	554.2	553.4
180	568.2	568.2	568.2	568.2	568.2	568.2	568.2	568.2
DEG	LUMINOUS INTENSITY:cd							

UGR Table - Corrected

UGR Table - Corrected										
Reflectances										
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20
Room Size		UGR Viewed Crosswise					UGR Viewed Endwise			
X=2H	Y=2H	20.9	21.8	21.9	22.8	24.0	19.7	20.5	20.6	21.5
	3H	22.6	23.3	23.5	24.3	25.6	21.2	21.9	22.2	22.9
	4H	23.1	23.8	24.1	24.8	26.1	21.7	22.4	22.7	23.4
	6H	23.4	24.1	24.4	25.1	26.4	22.0	22.7	23.0	23.7
	8H	23.5	24.1	24.5	25.1	26.5	22.1	22.7	23.1	23.7
	12H	23.5	24.1	24.5	25.1	26.5	22.1	22.7	23.1	23.7
4H	2H	21.3	22.0	22.3	23.0	24.3	20.3	21.0	21.3	22.0
	3H	23.1	23.7	24.1	24.7	26.1	22.0	22.6	23.0	23.6
	4H	23.8	24.4	24.8	25.4	26.7	22.6	23.1	23.6	24.2
	6H	24.3	24.8	25.3	25.8	27.1	23.0	23.5	24.1	24.5
	8H	24.4	24.8	25.4	25.9	27.2	23.2	23.6	24.2	24.6
	12H	24.4	24.8	25.5	25.9	27.2	23.2	23.6	24.2	24.6
8H	4H	24.0	24.4	25.0	25.4	26.8	22.9	23.3	23.9	24.3
	6H	24.5	24.9	25.6	25.9	27.3	23.4	23.8	24.4	24.8
	8H	24.7	25.0	25.7	26.1	27.4	23.6	23.9	24.6	24.9
	12H	24.8	25.1	25.8	26.1	27.5	23.7	23.9	24.7	25.0
12H	4H	23.9	24.3	25.0	25.4	26.7	22.9	23.3	23.9	24.3
	6H	24.5	24.8	25.6	25.9	27.3	23.4	23.7	24.5	24.8
	8H	24.7	25.0	25.8	26.0	27.5	23.6	23.9	24.7	25.0
Maximum UGR = 27.5										

4.2 Goniophotometer Test

ZONAL LUMEN SUMMARY

	Zonal (lm)		Total (lm)	Percent
0-10	55.19	0 - 10	55.19	2.05%
10-20	153.78	0 - 20	208.97	7.74%
20-30	221.36	0 - 30	430.33	15.95%
30-40	248.96	0 - 40	679.29	25.17%
40-50	239.19	0 - 50	918.48	34.03%
50-60	201.02	0 - 60	1119.50	41.48%
60-70	143.65	0 - 70	1263.15	46.81%
70-80	76.41	0 - 80	1339.56	49.64%
80-90	17.98	0 - 90	1357.54	50.30%
90-100	14.57	0 - 100	1372.11	50.84%
100-110	70.48	0 - 110	1442.59	53.45%
110-120	139.18	0 - 120	1581.77	58.61%
120-130	200.23	0 - 130	1782.00	66.03%
130-140	241.51	0 - 140	2023.51	74.98%
140-150	250.87	0 - 150	2274.38	84.28%
150-160	220.17	0 - 160	2494.55	92.43%
160-170	150.67	0 - 170	2645.22	98.02%
170-180	53.53	0 - 180	2698.75	100.00%

4.2 Goniophotometer Test


COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	94	90	87	90	87	84	81	74	71	69	61	60	58	50	49	48	43
2	89	82	76	71	82	76	71	67	65	61	58	54	51	49	44	43	41	36
3	82	72	65	59	75	67	61	56	57	53	49	48	45	42	40	37	35	31
4	75	64	56	50	69	60	53	47	51	46	42	43	39	36	36	33	30	27
5	69	57	49	43	63	53	46	41	46	40	36	39	35	31	32	29	27	23
6	63	52	44	38	58	48	41	36	41	36	32	35	31	27	29	26	24	21
7	59	47	39	33	54	43	36	31	38	32	28	32	28	24	27	23	21	18
8	55	42	35	29	50	40	33	28	34	29	25	29	25	22	25	21	19	17
9	51	39	31	26	47	36	30	25	31	26	22	27	23	20	23	19	17	15
10	48	36	28	24	44	33	27	22	29	24	20	25	21	18	21	18	16	14

CONE OF LIGHT DIAGRAM

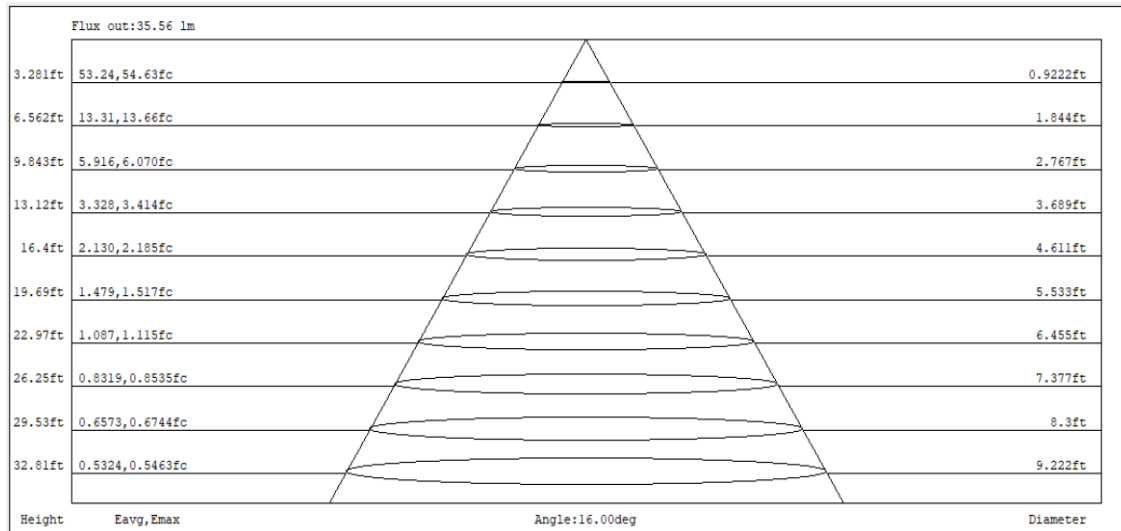

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	BOAE2PU @ 20W/3000K/50%/50%	Sample ID.	DLF2509110-AD1
Temperature (°C)	25.2	Humidity (%RH)	55.2

Test Method

The samples were tested according to the ANSI C82.77-10:2014.

The ambient temperature shall be maintained at 25° C ± 1.0° C and 10% - 65% RH. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
120.01	60	0.169	20.2	0.996	2.73%
277.02	60	0.080	20.4	0.926	6.83%

5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2024/12/23	2025/12/22
DLF108	Auxiliary Lamp	2024/12/23	2025/12/22
DLF122	Measurement Standard Lamp Standard Lamp Type: Tungsten, Omni-directional	2024/12/23	2025/12/22
DLF116	AC Power Source	2024/12/13	2025/12/12
DLF516	Power Meter	2024/12/13	2025/12/12
DLF112	Temperature Recorder	2024/12/19	2025/12/18
DLF114	Temperature & Humidity Datalogger	2024/12/19	2025/12/18
DLF521	Measurement Standard Lamp Standard Lamp Type: Tungsten, Omni-directional	2024/12/23	2025/12/22
DLF101	Goniophotometer	2024/12/23	2025/12/22
DLF511	AC Power Source	2024/12/13	2025/12/12
DLF512	AC Power Source	2024/12/13	2025/12/12
DLF513	AC Power Source	2024/12/13	2025/12/12
DLF507	DC Power Source	2024/12/13	2025/12/12
DLF111	Temperature & Humidity Datalogger	2024/12/19	2025/12/18
DLF119	Power Meter	2024/12/13	2025/12/12
DLF530	Hot-wire anemometer	2025/1/23	2026/1/22
DLF129	Clock	2025/9/4	2026/9/3

***** End of Test Report*****