

# Photometric Test Report

## Relevant Standards

- ☒ IES LM-79-2019
- ☒ ANSI C82.77-10:2014

## Prepared For

**RAB Lighting Inc.**

408 W 14th St, New York, NY 10014 United States

Xiao Xiang, 15921313292, Gary.Xiao@rablighting.com

## Prepared By

**Deliver Co., Ltd.**

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

## Project Number

**DLF2509110**

## Report Number

**DLF2509110-27a**

## Test Date

**2025/9/23**

## Issue Date

**2025/9/27**

### Test By

Hengshan Li

Hengshan Li

### Prepared By

Wangzun Zhu

Wangzun Zhu

### Approved By

Kevin Jia

Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

## 1.0 Test Summary

DLC Technical Requirements v5.1

Indoor - Linear Ambient - Direct Linear Ambient Luminaires				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2019	3000		10962
Lumen/ft (Goniophotometer - Section 4.2)	IES LM-79-2019	≥375		1370
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2019	Standard 115	Premium 130	142.9
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2019	Wrosted Case		76.7
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77-10: 2014	20.00%	120V	4.56%
		20.00%	277V	7.42%
Power Factor (THD & PF - section 4.3)	ANSI C82.77-10: 2014	0.9	120V	0.996
		0.9	277V	0.936
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2019	7 step	3465±245	3378
		4 step	3465±124	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2019 CIE 13.3-1995	≥80		95
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2019 CIE 13.3-1995	≥0		69
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		91
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		101
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-12%≤IES Rcs,h1≤+23%		-5%
Zonal Lumen Requirement (0°-60°) (Goniophotometer - Section 4.2)	IES LM-79-2019	≥40%		82.08%
Corrected UGR (X=4H, Y=8H, 70/50/20%) (Goniophotometer - Section 4.2)	CIE 190-2010	<22		31.5
Input Voltage (V)				
(Goniophotometer - Section 4.2)	IES LM-79-2019	Worst Case		120
(Goniophotometer - Section 4.2)		Non-Worst Case		277
Input Current (A)				
(Goniophotometer - Section 4.2)	IES LM-79-2019	Worst Case		0.642
(Goniophotometer - Section 4.2)		Non-Worst Case		0.293
Power (Input Wattage - W)				
(Goniophotometer - Section 4.2)	IES LM-79-2019	Worst Case		76.7
(Goniophotometer - Section 4.2)		Non-Worst Case		76.0

## 2.0 Test List

Test Item	Test	Test Date	Model Number	Build Level	Sample No.
1	Integrating Sphere Test	2025/9/23	BOAE8P @ 80W/3500K	N/A	DLF2509110-AA1
2	Goniophotometer Test	2025/9/23	BOAE8P @ 80W/3500K	N/A	DLF2509110-AA1
3	THD and PF Test	2025/9/23	BOAE8P @ 80W/3500K	N/A	DLF2509110-AA1

### Remark(If any)

1. This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.
2. The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.


## 3.0 DUT Description

**Model Number:** BOAE8P @ 80W/3500K

**Electrical Rating:** 120V-277V,50/60HZ

**Received Date:** 2025/9/22

### Photos of Luminaire Characteristics

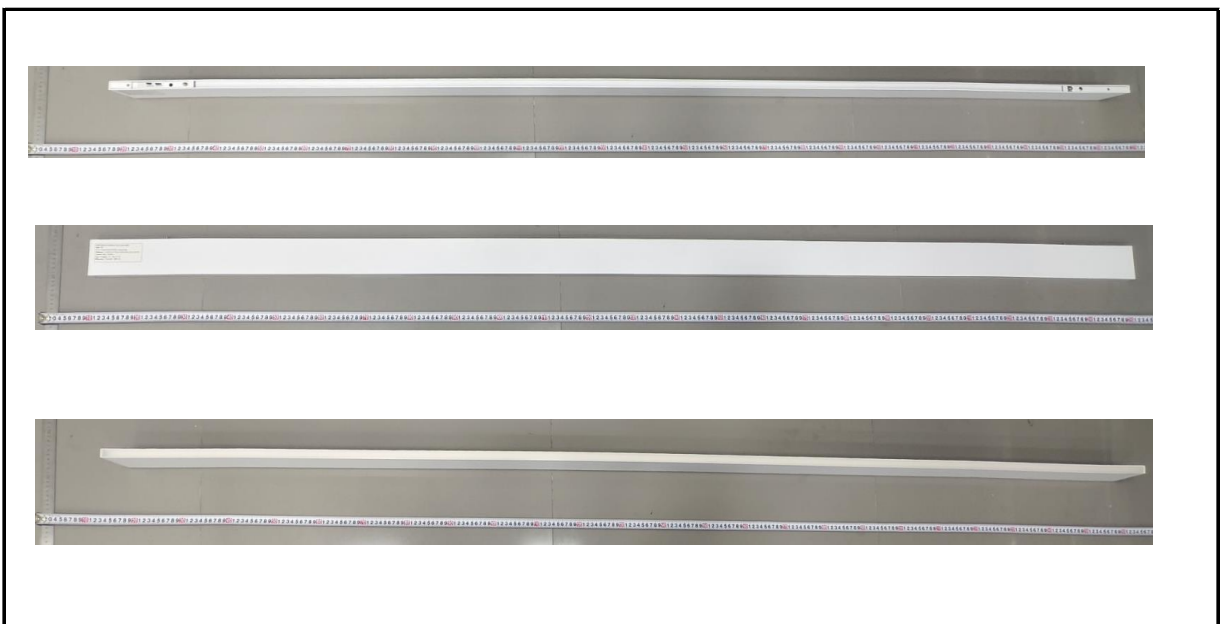

## 4.0 LM-79 Measurement and Test Results

### 4.1 Integrating Sphere Test

Model No.	BOAE8P @ 80W/3500K	Sample ID.	DLF2509110-AA1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.2	Humidity (%RH)	55.2

#### Test Method

The samples were tested according to the IES LM-79-2019.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature and relative humidity condition inside the sphere was maintained at 25° C ± 1.2° C and 10% - 65% RH.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

#### Test Result



Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
120.00	60	0.642	76.7	0.996
277.02	60	0.293	76.0	0.936

#### Test Result

CCT (K)	CRI	R9	Duv
3378	95	69	-0.0013

Rf	Rg	IES Rcs,h1
91	101	-5%

## 4.1 Integrating Sphere Test

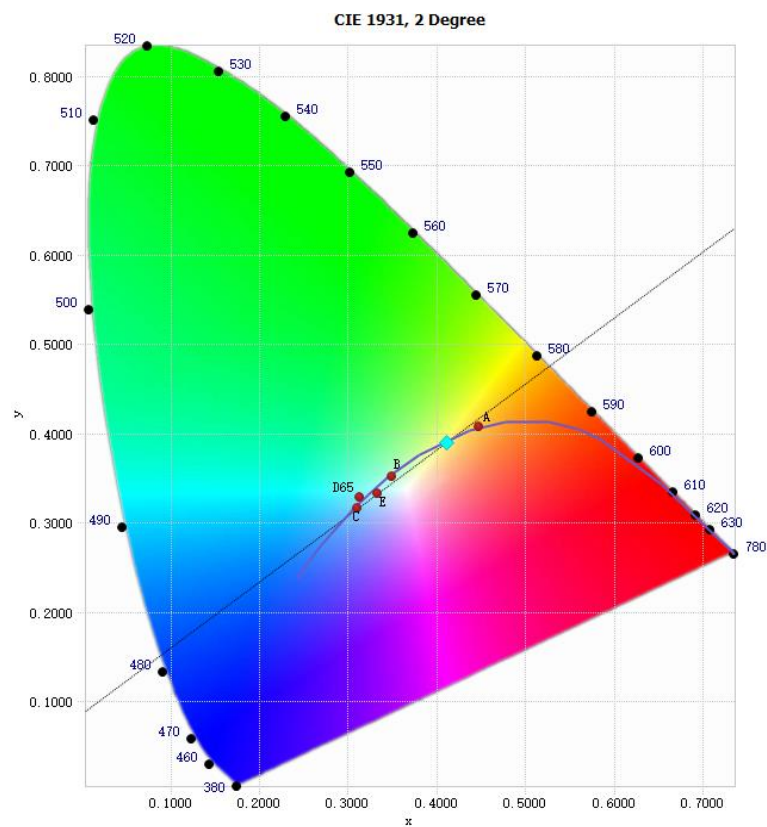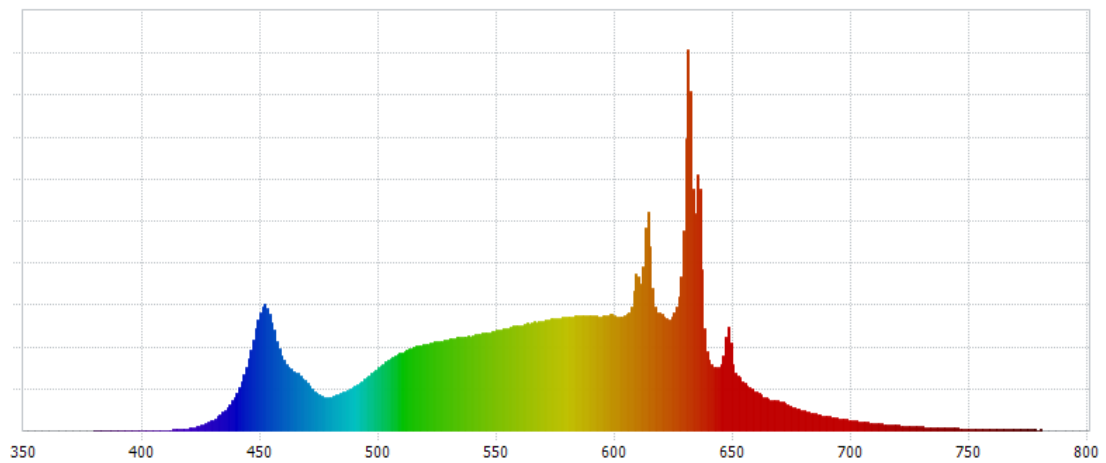

## 4.1 Integrating Sphere Test







### IES TM-30-18 Color Rendition Report

Source: DLF2509110-27a

Manufacturer: RAB Lighting Inc.

Date: 2025/9/23

Model: BOAE8P @ 80W/3500K

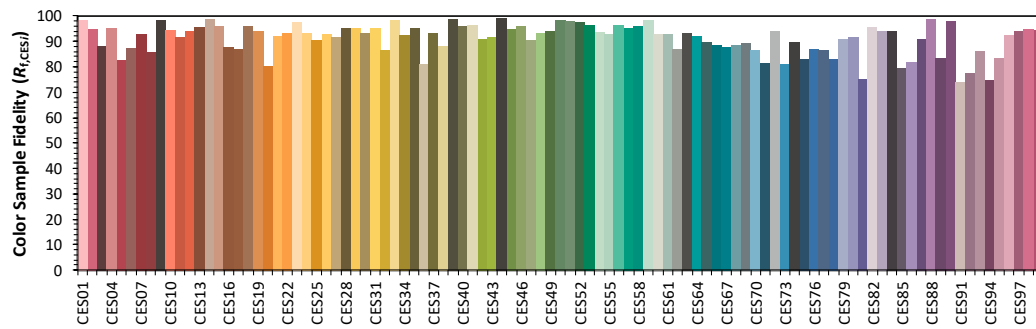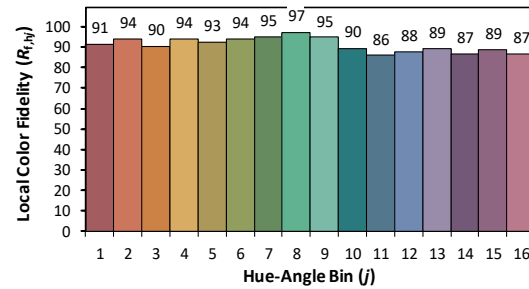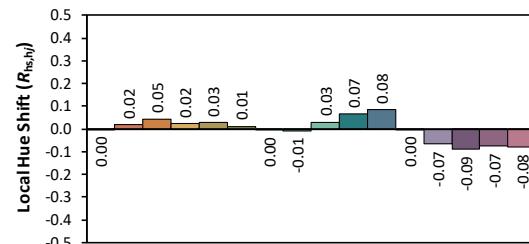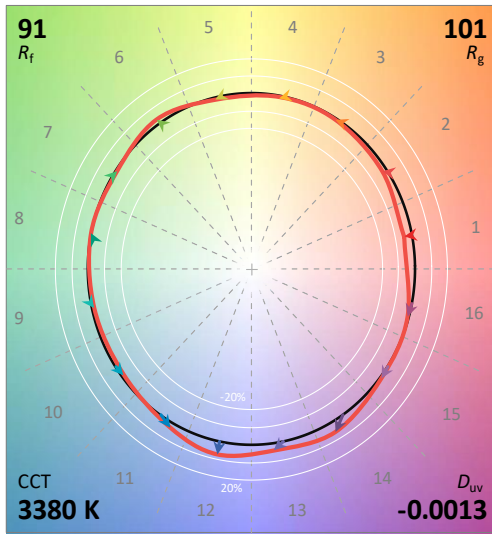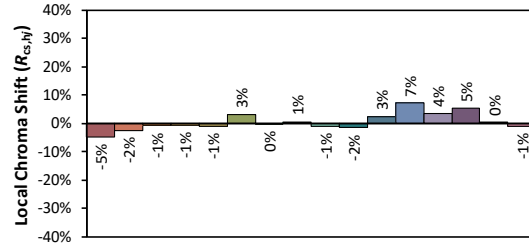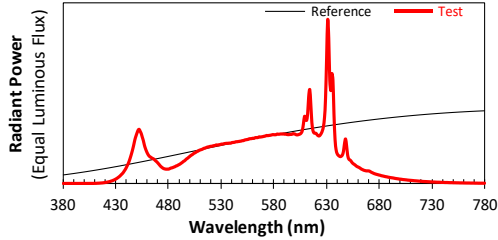

Notes: This is a recommended method for displaying IES TM-30-18 information.

$x$  0.4108  
 $y$  0.3904  
 $u'$  0.2394  
 $v'$  0.5119

CIE 13.3-1995  
(CRI)

$R_a$  95  
 $R_9$  71

#### 4.1 Integrating Sphere Test

Spectral Distribution over Visible Wavelength							
WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)	WL (nm)	Radiant (Watts/nm)
380	2.24E-04	485	5.11E-02	590	1.53E-01	695	1.60E-02
385	2.87E-04	490	5.89E-02	595	1.52E-01	700	1.36E-02
390	1.96E-04	495	7.03E-02	600	1.53E-01	705	1.15E-02
395	2.76E-04	500	8.40E-02	605	1.54E-01	710	9.81E-03
400	3.27E-04	505	9.53E-02	610	2.06E-01	715	8.28E-03
405	4.02E-04	510	1.04E-01	615	2.46E-01	720	6.92E-03
410	6.09E-04	515	1.10E-01	620	1.56E-01	725	5.96E-03
415	1.46E-03	520	1.16E-01	625	1.56E-01	730	4.98E-03
420	3.30E-03	525	1.20E-01	630	3.89E-01	735	4.10E-03
425	7.17E-03	530	1.22E-01	635	3.41E-01	740	3.56E-03
430	1.43E-02	535	1.25E-01	640	9.29E-02	745	3.11E-03
435	2.75E-02	540	1.27E-01	645	8.88E-02	750	2.49E-03
440	5.06E-02	545	1.30E-01	650	8.75E-02	755	2.23E-03
445	9.53E-02	550	1.33E-01	655	6.23E-02	760	1.80E-03
450	1.57E-01	555	1.37E-01	660	5.11E-02	765	1.65E-03
455	1.44E-01	560	1.40E-01	665	4.17E-02	770	1.36E-03
460	9.29E-02	565	1.43E-01	670	3.91E-02	775	1.12E-03
465	7.75E-02	570	1.46E-01	675	3.11E-02	780	1.01E-03
470	6.29E-02	575	1.49E-01	680	2.63E-02		
475	4.69E-02	580	1.51E-01	685	2.21E-02		
480	4.48E-02	585	1.53E-01	690	1.88E-02		



## 4.0 LM-79 Measurement and Test Results

### 4.2 Goniophotometer Test

Model No.	BOAE8P @ 80W/3500K	Sample ID.	DLF2509110-AA1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.1	Humidity (%RH)	55.0

#### Test Method

The samples were tested according to the IES LM-79-2019.

Photometric parameters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at  $25^{\circ}\text{C} \pm 1.2^{\circ}\text{C}$  and 10% - 65% RH, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within  $\pm 0.2$  percent under load.

Airflow for the instantaneous tangential velocity of any point on the DUT shall be less than an upper tolerance limit of 0.20 m/s.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at  $0.5^{\circ}$  vertical intervals and  $10^{\circ}$  horizontal intervals.

#### Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WORST CASE	120.00	60	0.642	76.7	0.996
NON-WORST CASE	277.02	60	0.293	76.0	0.936

#### Test Result

4FT light output in Sphere	4774	Scale Factor	2.09761207
8FT light output in Sphere	10014	4FT Gonio Light output	5226


Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
10962	150.7	158.7	86.0	110.1	142.9

Zonal Lumen Requirement ( $0^{\circ}$ - $60^{\circ}$ )	UGR (X=4H, Y=8H, 70/50/20%)	Length(ft)	Lumen/ft
82.08%	31.5	8	1370



## 4.2 Goniophotometer Test

### Light Distrubtion Curve

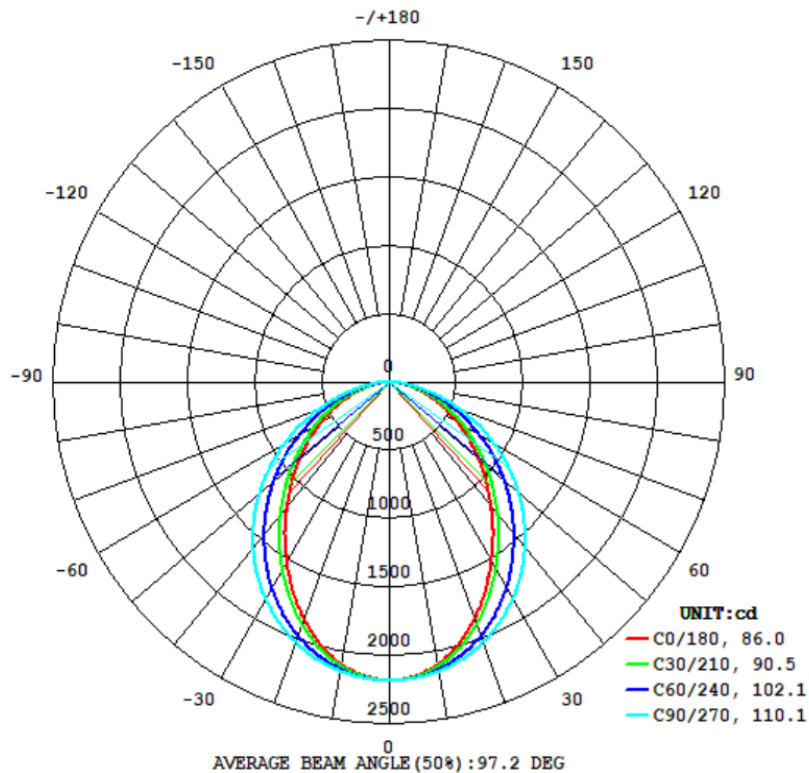

### UGR Table - Corrected

#### UGR Table - Corrected

Reflectances										
Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20
Room Size										
X=2H Y=2H	UGR Viewed Crosswise					UGR Viewed Endwise				
3H	27.8	29.3	28.1	29.7	30.0	25.5	27.1	25.9	27.4	27.7
4H	29.5	31.0	29.9	31.3	31.7	27.1	28.5	27.4	28.8	29.2
6H	30.2	31.5	30.6	31.9	32.2	27.6	28.9	28.0	29.3	29.7
8H	30.6	31.8	31.0	32.2	32.6	27.9	29.2	28.3	29.5	29.9
12H	30.7	31.8	31.1	32.2	32.6	28.0	29.2	28.4	29.6	30.0
4H	30.7	31.8	31.1	32.2	32.6	28.0	29.2	28.5	29.5	30.0
2H	28.1	29.5	28.5	29.8	30.2	26.3	27.7	26.7	28.0	28.4
3H	30.1	31.2	30.5	31.6	32.0	28.0	29.2	28.4	29.6	30.0
4H	30.9	31.9	31.3	32.3	32.7	28.7	29.7	29.1	30.1	30.5
6H	31.4	32.3	31.8	32.7	33.2	29.1	30.0	29.5	30.4	30.9
8H	31.5	32.3	32.0	32.8	33.3	29.2	30.0	29.6	30.4	30.9
12H	31.6	32.3	32.1	32.8	33.3	29.2	30.0	29.7	30.4	30.9
8H	31.0	31.8	31.5	32.3	32.7	29.0	29.8	29.5	30.3	30.8
6H	31.6	32.3	32.1	32.8	33.3	29.5	30.2	30.0	30.7	31.2
8H	31.8	32.4	32.3	32.9	33.4	29.7	30.3	30.2	30.8	31.3
12H	31.9	32.4	32.4	32.9	33.5	29.8	30.3	30.3	30.8	31.3
12H	31.0	31.7	31.5	32.2	32.7	29.0	29.8	29.5	30.3	30.7
6H	31.6	32.2	32.1	32.7	33.2	29.6	30.2	30.1	30.7	31.2
8H	31.8	32.4	32.3	32.9	33.4	29.8	30.3	30.3	30.8	31.4

Maximum UGR = 33.5

## 4.2 Goniophotometer Test

### ZONAL LUMEN SUMMARY

	Zonal (lm)		Total (lm)	Percent
0-10	430.48	0 - 10	430.48	3.93%
10-20	1205.2	0 - 20	1635.68	14.92%
20-30	1750.5	0 - 30	3386.18	30.89%
30-40	1996.5	0 - 40	5382.68	49.11%
40-50	1951.86	0 - 50	7334.54	66.91%
50-60	1662.4	0 - 60	8996.94	82.08%
60-70	1199.27	0 - 70	10196.21	93.02%
70-80	633.91	0 - 80	10830.12	98.80%
80-90	131.42	0 - 90	10961.54	100.00%
90-100	0	0 - 100	10961.54	100.00%
100-110	0	0 - 110	10961.54	100.00%
110-120	0	0 - 120	10961.54	100.00%
120-130	0	0 - 130	10961.54	100.00%
130-140	0	0 - 140	10961.54	100.00%
140-150	0	0 - 150	10961.54	100.00%
150-160	0	0 - 160	10961.54	100.00%
160-170	0	0 - 170	10961.54	100.00%
170-180	0	0 - 180	10961.54	100.00%

## 4.2 Goniophotometer Test

### COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

#### Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
Rw	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	109	105	101	97	107	103	99	96	98	95	93	95	92	90	91	89	87	85
2	100	92	86	80	97	90	84	79	87	82	77	83	79	76	80	77	74	72
3	91	81	74	67	89	80	73	67	77	71	65	74	69	64	72	67	63	61
4	84	72	64	57	82	71	63	57	69	62	56	66	60	56	64	59	55	53
5	77	65	56	50	75	64	56	50	62	55	49	60	53	49	58	52	48	46
6	72	59	50	44	70	58	50	44	56	49	43	54	48	43	53	47	42	40
7	67	53	45	39	65	53	45	39	51	44	38	50	43	38	48	42	38	36
8	62	49	41	35	61	48	40	35	47	40	35	46	39	34	45	39	34	32
9	58	45	37	32	57	44	37	31	43	36	31	42	36	31	41	35	31	29
10	55	42	34	29	53	41	34	29	40	33	29	39	33	28	38	32	28	27

## 4.0 LM-79 Measurement and Test Results

### 4.3 THD and PF Test

Model No.	BOAE8P @ 80W/3500K	Sample ID.	DLF2509110-AA1
Temperature (°C)	25.2	Humidity (%RH)	55.2

#### Test Method

The samples were tested according to the ANSI C82.77-10:2014.

The ambient temperature shall be maintained at  $25^{\circ}\text{C} \pm 1.0^{\circ}\text{C}$  and 10% - 65% RH. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

#### Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
120.00	60	0.642	76.7	0.996	4.56%
277.02	60	0.293	76.0	0.936	7.42%

## 5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2024/12/23	2025/12/22
DLF108	Auxiliary Lamp	2024/12/23	2025/12/22
DLF122	Measurement Standard Lamp Standard Lamp Type: Tungsten, Omni-directional	2024/12/23	2025/12/22
DLF116	AC Power Source	2024/12/13	2025/12/12
DLF516	Power Meter	2024/12/13	2025/12/12
DLF112	Temperature Recorder	2024/12/19	2025/12/18
DLF114	Temperature & Humidity Datalogger	2024/12/19	2025/12/18
DLF521	Measurement Standard Lamp Standard Lamp Type: Tungsten, Omni-directional	2024/12/23	2025/12/22
DLF101	Goniophotometer	2024/12/23	2025/12/22
DLF511	AC Power Source	2024/12/13	2025/12/12
DLF512	AC Power Source	2024/12/13	2025/12/12
DLF513	AC Power Source	2024/12/13	2025/12/12
DLF507	DC Power Source	2024/12/13	2025/12/12
DLF111	Temperature & Humidity Datalogger	2024/12/19	2025/12/18
DLF119	Power Meter	2024/12/13	2025/12/12
DLF530	Hot-wire anemometer	2025/1/23	2026/1/22
DLF129	Clock	2025/9/4	2026/9/3

\*\*\*\*\* End of Test Report\*\*\*\*\*