

Photometric Test Report

Relevant Standards

- ☒ ANSI/IES LM-79-19
- ☒ ANSI C82.77-2020

Prepared For

RAB Lighting Inc.

Address: 408 W 14th St New York, NY 10014

Prepared By

Dongguan New Testing Centre Co., Ltd.

Address: 3F No. 1 the 1st North Industry Road, Songshan Lake Science & Technology Park, Dongguan, Guangdong, China

Prepare by:

Alan Wang

Engineer: Alan Wang

Date: 2025-12-10

Review by:

Vincent Yuan

Technical Lead: Vincent Yuan

Issue Date: 2025-12-10

Revised Date: N/A

1.0 Test Summary

DLC Technical Requirements V6.0

Track or Mono-Point Luminaires				
Requirement Category	Test Method	Requirements		Test Value
Luminaire Output (lm) (Goniophotometer – Section 4.2)	ANSI/IES LM-79-19	≥250lm		688
Minimum Luminaire Efficacy (lm/W) (Goniophotometer – Section 4.2)	ANSI/IES LM-79-19	Standard	Premium	87.1
		95	110	
Power (Input Wattage) (W) (Goniophotometer – Section 4.2)	ANSI/IES LM-79-19	Worst Case		7.9
Total Harmonic Distortion (A%) (THD & PF – Section 4.3)	ANSI C82.77:2002 ANSI C82-77-10:2020	20.00%	120V	12.87
Power Factor (THD & PF – Section 4.3)	ANSI C82.77:2002 ANSI C82-77-10:2020	0.9	120V	0.966
Allowable CCTs* (K) (Integrating Sphere – Section 4.1)	ANSI/IES LM-79-19	7 steps	3045±175	3046
		4 steps	3045±100	
Chromaticity (D _{uv}) (Integrating Sphere – Section 4.1)	ANSI/IES LM-79-19	7 steps	0.0001±0.0060	-0.0006
		4 steps	0.0001±0.0033	
Minimum CRI (Integrating Sphere – Section 4.1)	ANSI/IES LM-79 19 CIE13.3-1995	≥80		95.4
Minimum R9 (Integrating Sphere – Section 4.1)	ANSI/IES LM-79-19 CIE13.3-1995	≥0		72
Minimum Rf (Integrating Sphere – Section 4.1)	ANSI/IES TM-30-24	≥70		92
Minimum Rg (Integrating Sphere – Section 4.1)	ANSI/IES TM-30-24	≥89		98
IES Rcs,h1 (Integrating Sphere – Section 4.1)	ANSI/IES TM-30-24	-12%≤IES Rcs,h1≤+23%		-3%
Zonal Lumen Requirement (0°-90°) (Goniophotometer – Section 4.2)	ANSI/IES LM-79-19	≥ 85%		100.0%
Input Voltage (V)				
(Goniophotometer – Section 4.2)	ANSI/IES LM-79-19	Worst Cast		120.0
(Goniophotometer – Section 4.2)		Non-Worst Case		N/A
Input Current (A)				
(Goniophotometer – Section 4.2)	ANSI/IES LM-79-19	Worst Case		0.068
(Goniophotometer – Section 4.2)		Non-Worst Case		N/A
Power (Input Wattage – W)				
(Goniophotometer – Section 4.2)	ANSI/IES LM-79-19	Worst Case		7.9
(Goniophotometer – Section 4.2)		Non-Worst Case		N/A

2.0 Test List

Test Item	Test	Test Date	Model Number	Build Level	Sample No.
1	Integrating Sphere Test	2025-12-08	PIVOTMB @8W3000K	-	250903027-S1
2	Goniophotometer Test	2025-12-08	PIVOTMB @8W3000K	-	250903027-S1
3	THD and PF Test	2025-12-08	PIVOTMB @8W3000K	-	250903027-S1

Remark (If any):

1. The results contained in this report pertain only to the tested samples.
2. This report shall not be reproduced, no limited part or full, without approval of Dongguan New Testing Centre Co., Ltd.
3. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. Government.

3.0 Product Description

Luminaire Description: Model No. PIVOTMB @8W3000K, color tunable from 2700K, 3000K, 3500K, 4000K and 5000K.

Electrical Specification: 120Vac, 60Hz

Photos of Luminaire Characteristics



4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	PIVOTMB @8W3000K	Sample ID	250903027-S1
Operate time (Min.)	10	Stabilization time (Min.)	60
Temperature (°C)	25.4	Humidity (%RH)	41.0


Test Method
<p>The Samples were tested according to the ANSI/IES LM-79:2019.</p> <p>Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25\pm1^{\circ}\text{C}$.</p> <p>The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.</p> <p>The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.</p> <p>The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780nm.</p>

Test Result

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
120.0	60	0.068	7.9	0.966

CCT (K)	CRI	R9	Duv	SDCM	Rf	Rg	IES Rcs,h1
3046	95.4	72	-0.0006	0.9	92	98	-3%

4.1 Integrating Sphere Test

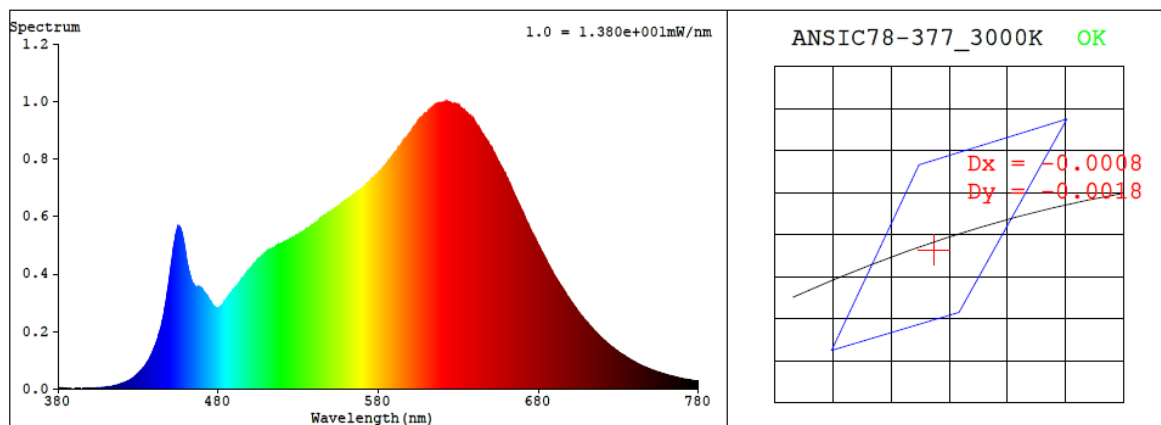

Colorimetric Parameters

Chromaticity Coordinate: $x = 0.4329$ $y = 0.4012$ / $u' = 0.2492$ $v' = 0.5196$ ($duv = -5.91e-04$)

CCT= 3046K Prcp WL: $L_d = 582.8\text{nm}$ Purity=50.3%

Peak WL: $L_p = 622\text{nm}$ FWHM: $= 161.3\text{nm}$ Ratio: R=24.6% G=72.0% B=3.4%

Render Index: $R_a = 95.4$ AvgR = 94.0 TM30: $R_f = 93$ $R_g = 99$

EEL: 0.14247 A+

R1 =97 R2 =99 R3 =98 R4 =96 R5 =97 R6 =96 R7 =93

R8 =87 R9 =72 R10=100 R11=98 R12=84 R13=99 R14=99 R15=94

4.1 Integrating Sphere Test







ANSI/IES TM-30-24 Color Rendition Report

Source: BXRV-TR-2750G-20A0-A-2x
Date: 2025/12/10
Notes: N/A

Make: RAB Lighting Inc.
Model: PIVOTMB @8W3000K
Other: N/A

CCT: 3045 K
 D_{uv} : -0.0006

P2 V- F2

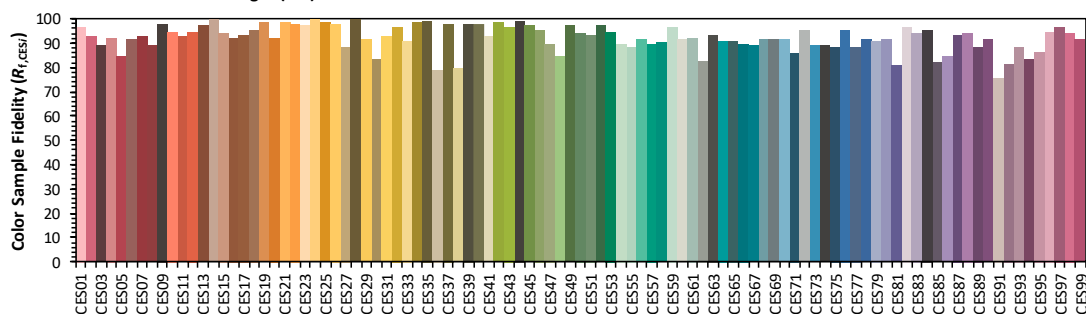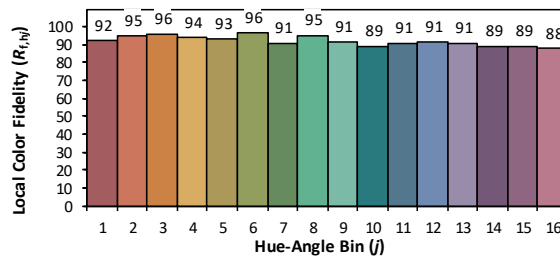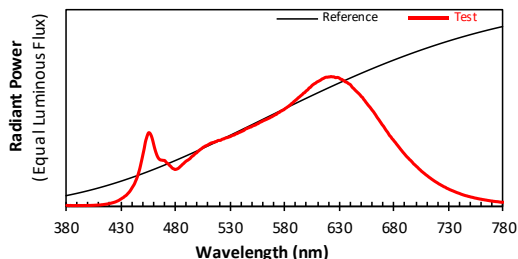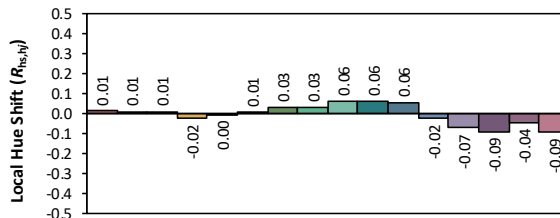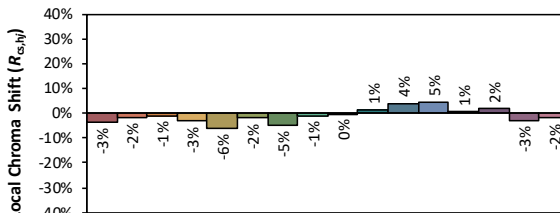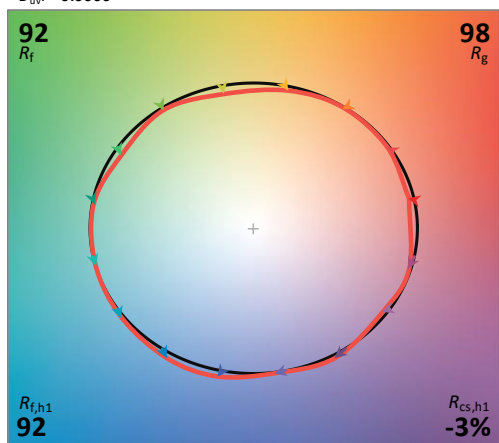

TM-30 Advanced Calculator Version 2.04

Created

2025/12/10

4.1 Integrating Sphere Test

Spectral Distribution over Visible Wavelength											
WL (nm)	Radiant (W/nm)	WL (nm)	Radiant (W/nm)	WL (nm)	Radiant (W/nm)	WL (nm)	Radiant (W/nm)	WL (nm)	Radiant (W/nm)	WL (nm)	Radiant (W/nm)
380	3.10E-03	447	2.92E-01	514	4.89E-01	581	7.56E-01	648	8.64E-01	715	2.02E-01
381	2.80E-03	448	3.29E-01	515	4.91E-01	582	7.63E-01	649	8.55E-01	716	1.97E-01
382	1.10E-03	449	3.67E-01	516	4.96E-01	583	7.68E-01	650	8.43E-01	717	1.91E-01
383	2.80E-03	450	4.06E-01	517	4.96E-01	584	7.75E-01	651	8.38E-01	718	1.85E-01
384	2.00E-03	451	4.46E-01	518	5.03E-01	585	7.82E-01	652	8.24E-01	719	1.80E-01
385	1.90E-03	452	4.92E-01	519	5.06E-01	586	7.91E-01	653	8.14E-01	720	1.75E-01
386	1.70E-03	453	5.22E-01	520	5.06E-01	587	7.95E-01	654	8.02E-01	721	1.69E-01
387	1.60E-03	454	5.49E-01	521	5.07E-01	588	8.05E-01	655	7.91E-01	722	1.65E-01
388	2.10E-03	455	5.65E-01	522	5.13E-01	589	8.11E-01	656	7.80E-01	723	1.60E-01
389	1.70E-03	456	5.62E-01	523	5.16E-01	590	8.19E-01	657	7.70E-01	724	1.55E-01
390	1.60E-03	457	5.49E-01	524	5.18E-01	591	8.26E-01	658	7.60E-01	725	1.50E-01
391	2.40E-03	458	5.27E-01	525	5.23E-01	592	8.35E-01	659	7.49E-01	726	1.46E-01
392	2.30E-03	459	4.96E-01	526	5.25E-01	593	8.40E-01	660	7.37E-01	727	1.43E-01
393	1.90E-03	460	4.61E-01	527	5.27E-01	594	8.48E-01	661	7.27E-01	728	1.36E-01
394	2.00E-03	461	4.30E-01	528	5.30E-01	595	8.55E-01	662	7.15E-01	729	1.33E-01
395	1.80E-03	462	4.04E-01	529	5.33E-01	596	8.62E-01	663	7.02E-01	730	1.29E-01
396	2.50E-03	463	3.83E-01	530	5.36E-01	597	8.71E-01	664	6.89E-01	731	1.25E-01
397	1.90E-03	464	3.68E-01	531	5.41E-01	598	8.75E-01	665	6.76E-01	732	1.21E-01
398	2.00E-03	465	3.59E-01	532	5.45E-01	599	8.85E-01	666	6.65E-01	733	1.18E-01
399	2.70E-03	466	3.54E-01	533	5.47E-01	600	8.92E-01	667	6.52E-01	734	1.15E-01
400	2.40E-03	467	3.53E-01	534	5.50E-01	601	8.99E-01	668	6.40E-01	735	1.11E-01
401	2.90E-03	468	3.51E-01	535	5.57E-01	602	9.10E-01	669	6.27E-01	736	1.07E-01
402	2.80E-03	469	3.51E-01	536	5.58E-01	603	9.15E-01	670	6.17E-01	737	1.04E-01
403	3.40E-03	470	3.48E-01	537	5.63E-01	604	9.24E-01	671	6.04E-01	738	1.01E-01
404	3.50E-03	471	3.36E-01	538	5.67E-01	605	9.33E-01	672	5.91E-01	739	9.77E-02
405	3.90E-03	472	3.29E-01	539	5.70E-01	606	9.39E-01	673	5.79E-01	740	9.47E-02
406	4.40E-03	473	3.23E-01	540	5.74E-01	607	9.44E-01	674	5.68E-01	741	9.09E-02
407	5.00E-03	474	3.14E-01	541	5.78E-01	608	9.48E-01	675	5.54E-01	742	8.79E-02
408	5.30E-03	475	3.06E-01	542	5.82E-01	609	9.56E-01	676	5.41E-01	743	8.50E-02
409	5.60E-03	476	2.97E-01	543	5.88E-01	610	9.60E-01	677	5.33E-01	744	8.22E-02
410	6.60E-03	477	2.89E-01	544	5.95E-01	611	9.64E-01	678	5.19E-01	745	7.96E-02
411	6.50E-03	478	2.86E-01	545	5.97E-01	612	9.69E-01	679	5.11E-01	746	7.74E-02
412	8.20E-03	479	2.81E-01	546	6.02E-01	613	9.74E-01	680	5.00E-01	747	7.54E-02
413	8.70E-03	480	2.82E-01	547	6.04E-01	614	9.81E-01	681	4.90E-01	748	7.25E-02
414	1.01E-02	481	2.85E-01	548	6.09E-01	615	9.84E-01	682	4.79E-01	749	7.10E-02
415	1.12E-02	482	2.89E-01	549	6.10E-01	616	9.89E-01	683	4.68E-01	750	6.82E-02
416	1.25E-02	483	2.96E-01	550	6.16E-01	617	9.93E-01	684	4.58E-01	751	6.65E-02
417	1.38E-02	484	3.04E-01	551	6.19E-01	618	9.94E-01	685	4.47E-01	752	6.48E-02
418	1.55E-02	485	3.11E-01	552	6.23E-01	619	9.94E-01	686	4.36E-01	753	6.23E-02
419	1.76E-02	486	3.20E-01	553	6.25E-01	620	9.96E-01	687	4.25E-01	754	6.01E-02
420	1.92E-02	487	3.27E-01	554	6.32E-01	621	9.96E-01	688	4.15E-01	755	5.87E-02
421	2.14E-02	488	3.35E-01	555	6.34E-01	622	9.99E-01	689	4.05E-01	756	5.68E-02
422	2.36E-02	489	3.43E-01	556	6.39E-01	623	9.97E-01	690	3.95E-01	757	5.48E-02
423	2.59E-02	490	3.49E-01	557	6.45E-01	624	9.97E-01	691	3.85E-01	758	5.33E-02
424	2.86E-02	491	3.53E-01	558	6.49E-01	625	9.96E-01	692	3.76E-01	759	5.15E-02
425	3.15E-02	492	3.60E-01	559	6.53E-01	626	9.91E-01	693	3.68E-01	760	5.03E-02
426	3.56E-02	493	3.66E-01	560	6.58E-01	627	9.91E-01	694	3.58E-01	761	4.81E-02
427	3.91E-02	494	3.76E-01	561	6.61E-01	628	9.92E-01	695	3.51E-01	762	4.72E-02
428	4.38E-02	495	3.83E-01	562	6.65E-01	629	9.90E-01	696	3.42E-01	763	4.54E-02
429	4.95E-02	496	3.89E-01	563	6.68E-01	630	9.85E-01	697	3.33E-01	764	4.43E-02
430	5.45E-02	497	3.98E-01	564	6.72E-01	631	9.79E-01	698	3.22E-01	765	4.26E-02
431	6.04E-02	498	4.05E-01	565	6.77E-01	632	9.77E-01	699	3.16E-01	766	4.12E-02
432	6.49E-02	499	4.10E-01	566	6.80E-01	633	9.71E-01	700	3.07E-01	767	3.99E-02
433	7.29E-02	500	4.19E-01	567	6.86E-01	634	9.67E-01	701	3.01E-01	768	3.83E-02
434	7.80E-02	501	4.25E-01	568	6.89E-01	635	9.59E-01	702	2.92E-01	769	3.71E-02
435	8.58E-02	502	4.33E-01	569	6.94E-01	636	9.56E-01	703	2.83E-01	770	3.64E-02
436	9.53E-02	503	4.39E-01	570	6.99E-01	637	9.53E-01	704	2.76E-01	771	3.45E-02
437	1.04E-01	504	4.45E-01	571	7.05E-01	638	9.45E-01	705	2.68E-01	772	3.39E-02
438	1.15E-01	505	4.52E-01	572	7.07E-01	639	9.41E-01	706	2.61E-01	773	3.25E-02
439	1.28E-01	506	4.57E-01	573	7.15E-01	640	9.35E-01	707	2.54E-01	774	3.21E-02
440	1.42E-01	507	4.62E-01	574	7.20E-01	641	9.23E-01	708	2.47E-01	775	3.14E-02
441	1.55E-01	508	4.66E-01	575	7.24E-01	642	9.12E-01	709	2.40E-01	776	2.99E-02
442	1.70E-01	509	4.69E-01	576	7.31E-01	643	9.06E-01	710	2.34E-01	777	2.87E-02
443	1.90E-01	510	4.75E-01	577	7.34E-01	644	8.96E-01	711	2.27E-01	778	2.78E-02
444	2.09E-01	511	4.79E-01	578	7.40E-01	645	8.88E-01	712	2.20E-01	779	2.78E-02
445	2.34E-01	512	4.84E-01	579	7.43E-01	646	8.80E-01	713	2.15E-01	780	2.78E-02
446	2.61E-01	513	4.87E-01	580	7.51E-01	647	8.72E-01	714	2.08E-01	N/A	N/A

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	PIVOTMB @8W3000K	Sample ID	250903027-S1
Operate time (Min.)	30	Stabilization time (Min.)	60
Temperature (°C)	25.0	Humidity (%RH)	42.1

Test Method
<p>The Samples were tested according to the ANSI/IES LM-79:2019.</p> <p>Photometric parameters were measured using a type C goniophotometer and software.</p> <p>The ambient temperature shall be maintained at $25 \pm 1^\circ\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample.</p> <p>The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.</p> <p>The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 1.0° vertical intervals and 15° horizontal intervals.</p>

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WORST CASE	120.0	60	0.068	7.9	0.966
NON-WORST CASE	N/A	N/A	N/A	N/A	N/A


Test Result

Flux (lm)	Field Angle (10%)		Beam Angle (50%)		Luminous Efficacy (lm/W)	Zonal Lumen Requirement
	C0-180	C90-270	C0-180	C90-270		(0°-90°)
688	69.3	68.6	39.4	39.1	87.1	100.0%


4.2 Goniophotometer Test

Lighting Distribution Curve

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

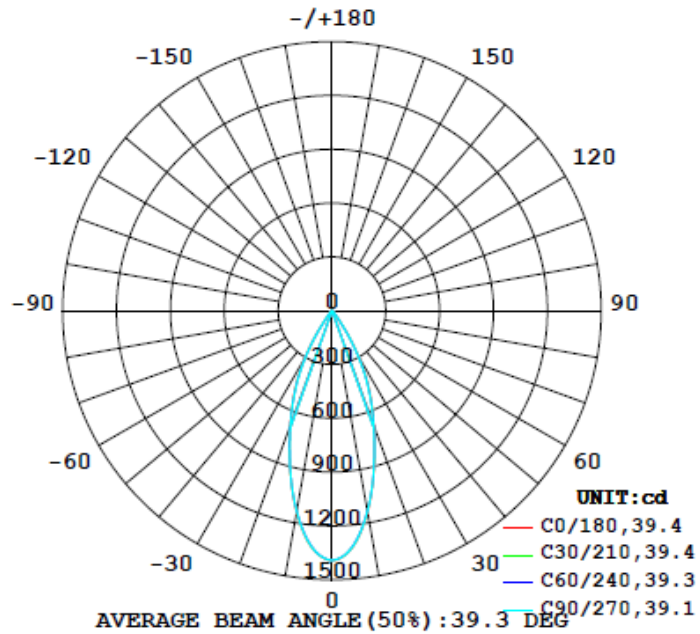

Isolux Plot

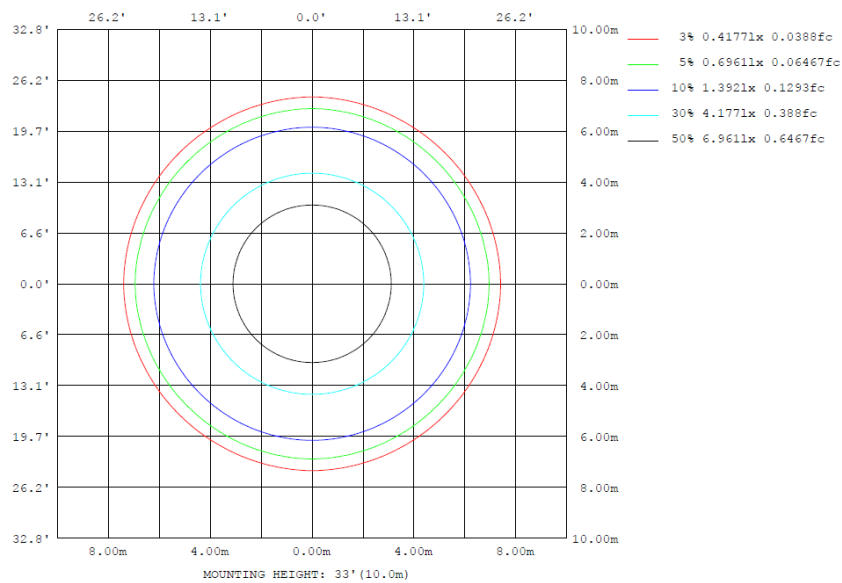

4.2 Goniophotometer Test

Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1142	1136	1136	1136	1142	1136	1136	1136	0- 10	120.0	120.0	17.4,17.4
20	684.1	681.3	678.0	681.3	684.1	681.3	678.0	681.3	10- 20	249.9	369.9	53.8,53.8
30	299.0	291.5	286.2	291.5	299.0	291.5	286.2	291.5	20- 30	220.1	590.0	85.8,85.8
40	28.87	28.49	28.14	28.49	28.87	28.49	28.14	28.49	30- 40	76.99	667.0	96.9,96.9
50	10.96	11.28	10.98	11.28	10.96	11.28	10.98	11.28	40- 50	12.26	679.2	98.7,98.7
60	4.035	4.034	3.869	4.034	4.035	4.034	3.869	4.034	50- 60	6.624	685.9	99.7,99.7
70	0.5468	0.5515	0.5611	0.5515	0.5468	0.5515	0.5611	0.5515	60- 70	1.980	687.8	100,100
80	0.0406	0.0366	0.0321	0.0366	0.0406	0.0366	0.0321	0.0366	70- 80	0.1207	688.0	100,100
90	0	0	0	0	0	0	0	0	80- 90	0.0157	688.0	100,100
100	0	0	0	0	0	0	0	0	90-100	0	688.0	100,100
110	0	0	0	0	0	0	0	0	100-110	0	688.0	100,100
120	0	0	0	0	0	0	0	0	110-120	0	688.0	100,100
130	0	0	0	0	0	0	0	0	120-130	0	688.0	100,100
140	0	0	0	0	0	0	0	0	130-140	0	688.0	100,100
150	0	0	0	0	0	0	0	0	140-150	0	688.0	100,100
160	0	0	0	0	0	0	0	0	150-160	0	688.0	100,100
170	0	0	0	0	0	0	0	0	160-170	0	688.0	100,100
180	0	0	0	0	0	0	0	0	170-180	0	688.0	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Zonal (lm)		Total (lm)		Percent
0-10	120.04	0-10	120.04	17.45%
10-20	249.87	0-20	369.91	53.77%
20-30	220.06	0-30	589.97	85.76%
30-40	76.99	0-40	666.96	96.95%
40-50	12.26	0-50	679.22	98.73%
50-60	6.62	0-60	685.84	99.69%
60-70	1.98	0-70	687.82	99.98%
70-80	0.12	0-80	687.94	100.00%
80-90	0.02	0-90	687.96	100.00%
90-100	0.00	0-100	687.96	100.00%
100-110	0.00	0-110	687.96	100.00%
110-120	0.00	0-120	687.96	100.00%
120-130	0.00	0-130	687.96	100.00%
130-140	0.00	0-140	687.96	100.00%
140-150	0.00	0-150	687.96	100.00%
150-160	0.00	0-160	687.96	100.00%
160-170	0.00	0-170	687.96	100.00%
170-180	0.00	0-180	687.96	100.00%

4.2 Goniophotometer Test

Luminous Distribution Intensity Data

Table--1

UNIT: cd

C (DEG) y	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1392	1392	1392	1392	1392	1392	1392	1392	1392	1392	1392	1392	1392	1392	1392	1392	1392	1392	1392
5	1323	1322	1321	1320	1318	1319	1320	1319	1318	1320	1321	1322	1323	1322	1321	1320	1318	1319	1320
10	1142	1140	1137	1136	1135	1135	1136	1135	1135	1136	1137	1140	1142	1140	1137	1136	1135	1135	1136
15	907	907	906	905	903	905	903	905	903	905	906	907	907	907	906	905	903	905	903
20	684	683	683	681	680	679	678	679	680	681	683	683	684	683	683	681	680	679	678
25	495	493	489	488	486	484	484	484	486	488	489	493	495	493	489	488	486	484	484
30	299	296	293	291	290	288	286	288	290	291	293	296	299	296	293	291	290	288	286
35	119	114	109	106	105	107	110	107	105	106	109	114	119	114	109	106	105	107	110
40	28.9	28.8	28.6	28.5	28.3	28.1	28.1	28.1	28.3	28.5	28.6	28.8	28.9	28.8	28.6	28.5	28.3	28.1	28.1
45	14.5	14.7	14.8	14.8	14.9	14.7	14.6	14.7	14.9	14.8	14.8	14.7	14.5	14.7	14.8	14.8	14.9	14.7	14.6
50	11.0	11.1	11.3	11.3	11.2	11.0	11.0	11.0	11.2	11.3	11.3	11.1	11.0	11.1	11.3	11.3	11.2	11.0	11.0
55	7.40	7.50	7.53	7.52	7.37	7.23	7.21	7.23	7.37	7.52	7.53	7.50	7.40	7.50	7.53	7.52	7.37	7.23	7.21
60	4.04	4.09	4.09	4.03	3.98	3.91	3.87	3.91	3.98	4.03	4.09	4.09	4.04	4.09	4.09	4.03	3.98	3.91	3.87
65	1.89	1.91	1.91	1.89	1.87	1.88	1.84	1.88	1.87	1.89	1.91	1.91	1.89	1.91	1.91	1.89	1.87	1.88	1.84
70	0.55	0.56	0.55	0.55	0.53	0.53	0.56	0.53	0.53	0.55	0.55	0.56	0.55	0.56	0.55	0.53	0.53	0.56	0.56
75	0.07	0.07	0.07	0.07	0.06	0.06	0.06	0.06	0.06	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.06	0.06	0.06
80	0.04	0.04	0.04	0.04	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	0.04	0.04	0.04	0.04	0.03	0.03	0.03
85	0.02	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.01	0.02	0.01	0.01	0.01	0.01	0.01	0.01
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
100	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
105	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
110	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Table--2

UNIT: cd

C (DEG) y	285	300	315	330	345														
0	1392	1392	1392	1392	1392														
5	1319	1318	1320	1321	1322														
10	1135	1135	1136	1137	1140														
15	905	903	905	906	907														
20	679	680	681	683	683														
25	484	486	488	489	493														
30	288	290	291	293	296														
35	107	105	106	109	114														
40	28.1	28.3	28.5	28.6	28.8														
45	14.7	14.9	14.8	14.8	14.7														
50	11.0	11.2	11.3	11.3	11.1														
55	7.23	7.37	7.52	7.53	7.50														
60	3.91	3.98	4.03	4.09	4.09														
65	1.88	1.87	1.89	1.91	1.91														
70	0.53	0.53	0.55	0.55	0.56														
75	0.06	0.06	0.07	0.07	0.07														
80	0.03	0.03	0.04	0.04	0.04														
85	0.01	0.01	0.01	0.01	0.01														
90	0.00	0.00	0.00	0.00	0.00														
95	0.00	0.00	0.00	0.00	0.00														
100	0.00	0.00	0.00	0.00	0.00														
105	0.00	0.00	0.00	0.00	0.00														
110	0.00	0.00	0.00	0.00	0.00														
115	0.00	0.00	0.00	0.00	0.00														
120	0.00	0.00	0.00	0.00	0.00														
125	0.00	0.00	0.00	0.00	0.00														
130	0.00	0.00	0.00	0.00	0.00														
135	0.00	0.00	0.00	0.00	0.00														
140	0.00	0.00	0.00	0.00	0.00														
145	0.00	0.00	0.00	0.00	0.00														
150	0.00	0.00	0.00	0.00	0.00														
155	0.00	0.00	0.00	0.00	0.00														
160	0.00	0.00	0.00	0.00	0.00														
165	0.00	0.00	0.00	0.00	0.00														
170	0.00	0.00	0.00	0.00	0.00														
175	0.00	0.00	0.00	0.00	0.00														
180	0.00	0.00	0.00	0.00	0.00														

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	PIVOTMB @8W3000K	Sample ID	250903027-S1
Temperature (°C)	25.4	Humidity (%RH)	41.0

Test Method
<p>The samples were tested according to the and ANSI C82.77: 2002 and ANSI C82.77-10:2020</p> <p>The total harmonic distortion shall be measured to the 40th order.</p> <p>The ambient temperature shall be maintained at $25 \pm 1^\circ\text{C}$. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion was calculated.</p>

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	iTHD(%)
120.0	60	0.068	7.9	0.966	12.87

5.0 Equipment List:

Equipment ID	Equipment Name	Last Cal.	Due Cal.
NTC-F01-001	Goniophotometer System	2025-11-06	2026-11-05
NTC-F01-006	2.0 meter Integrating Sphere	2025-11-06	2026-11-05
NTC-F01-012	Standard Lamp	2025-10-27	2026-10-26
NTC-F01-013	Standard Lamp	2025-10-27	2026-10-26
NTC-F01-031	Digital Power Meter	2025-08-04	2026-08-03
NTC-F01-019	Temperature & Humidity Meter	2025-10-23	2026-10-22

*****End of Report*****