



Photometric Test Report

Relevant Standards

- IES LM-79-2008
- ANSI C82.77:2014

Prepared For RAB LIGHTING INC

170 Ludlow Ave, PO BOX 970, Northvale, NJ 07647-2305 USA

Crystal Wu 13482123342, Crystal.Wu@rabweb.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF1906108

Report Number

DLF1906108-10a

Test Date

2019/6/14

Issue Date

2019/6/15

Prepared By

Wangzun Zhu

Approved By

Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co.,Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v4.4

Four Pin-Base Replacement Lamps for CFLs - Replacement Lamps ("Plug and Play") (UL Type A)				
Requirement Category	Test Method	Requirements	Test value	Results (Fail/Pass)
Bare Lamp				
Lamp Output for bare lamp (lm)	IES LM-79-2008	≥675	1663	P
		≥675	1840	P
Minimum Lamp Efficacy (lm/W)	IES LM-79-2008	≥75	88.5	P
		≥75	97.8	P
Allowable CCTs* (K)	IES LM-79-2008	2725±145	2775	P
		5029±283	5278	P
Minimum CRI	IES LM-79-2008 CIE 13.3-1995	≥80	82.1	P
		≥80	84	P
Power Factor	ANSI C82.77:2014	≥0.9	0.999	P
		≥0.9	0.988	P
Total Harmonic Distortion (A%)	ANSI C82.77:2014	≤20%	3.83%	P
		≤20%	9.18%	P
in Fixture				
Lamp Output (lm)	IES LM-79-2008	≥800	2670	P
Minimum Luminaire Efficacy (lm/W)	IES LM-79-2008	≥65	69.2	P
Zonal Lumen Requirement(0°-60°)	IES LM-79-2008	≥75%	97.74%	P

2.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2019/6/14	PLT-16-H-827-DIR	J1
			PLT-16-H-850-DIR	J3
2	Goniophotometer Test	2019/6/14	PLT-16-H-827-DIR	J1-J2
3	THD and PF Test	2019/6/14	PLT-16-H-827-DIR	J1

Remark(If any)

1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.

2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

3.0 Production Description


Luminaire Description: PLT-16-H-827-DIR / PLT-16-H-850-DIR

Electrical Specification: 120V-277V,50/60HZ

Test in fixture: Lithonia 6HF 2/26DTT MVOLT

Test with Ballast: QTP 2x26/32/42CF/UNV DM

Photos of Luminaire Characteristics

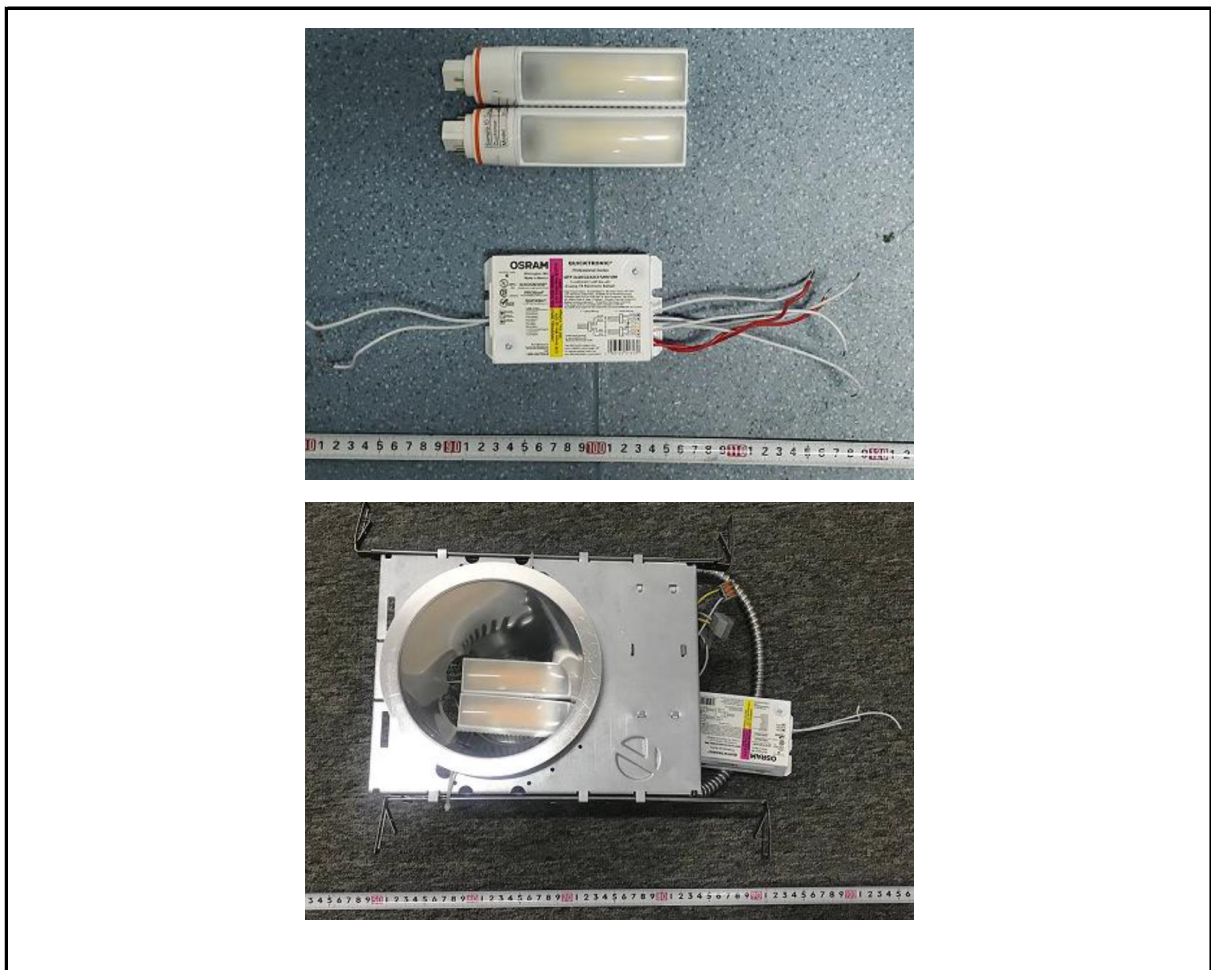

4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	PLT-16-H-827-DIR	Sample ID.	J1
Model No.	PLT-16-H-850-DIR	Sample ID.	J3
Operate time (Min.)	90	Stabilization time (Min.)	45

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.



Test Conditions

Model No.	Temperature ($^{\circ}\text{C}$)	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
PLT-16-H-827-DIR	25.1	120.00	60	0.157	18.80	0.999
PLT-16-H-850-DIR	25.1	120.00	60	0.157	18.82	0.999



Test Result

Model No.	CCT (K)	CRI (Ra)	Light Output (lm)	Efficacy (lm/W)	Duv
PLT-16-H-827-DIR	2775	82.1	1663	88.5	9.0E-04
PLT-16-H-850-DIR	5278	84.0	1840	97.8	1.6E-03

4.1 Integrating Sphere Test
 PLT-16-H-827-DIR

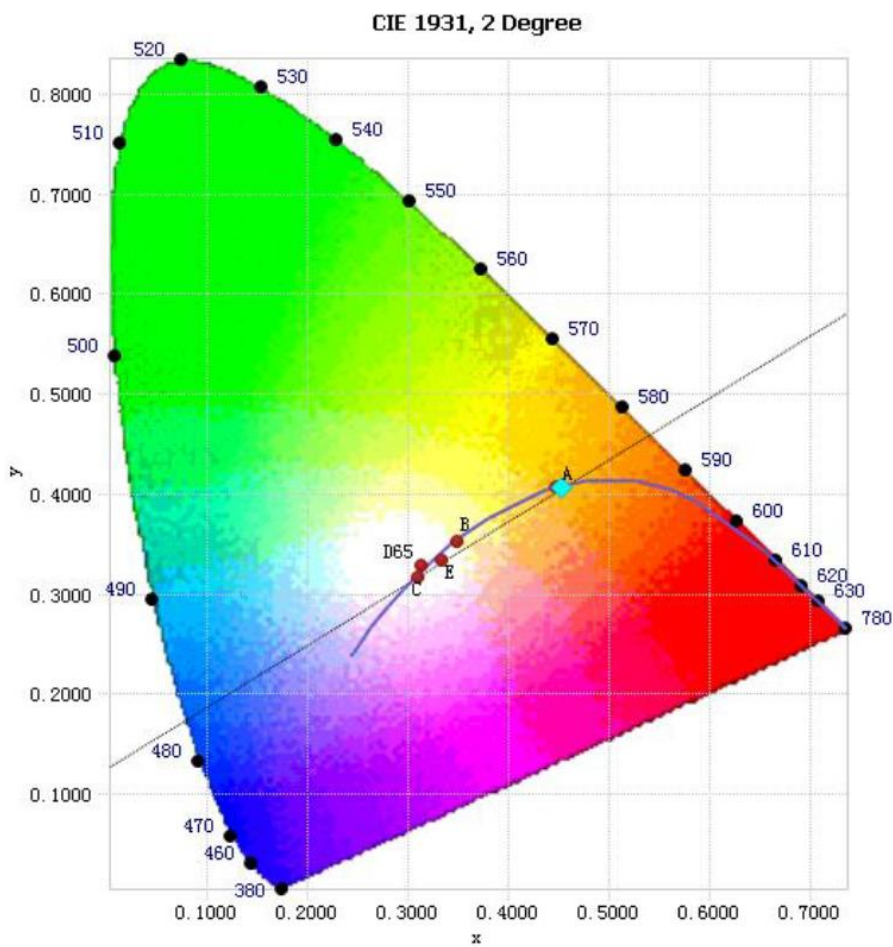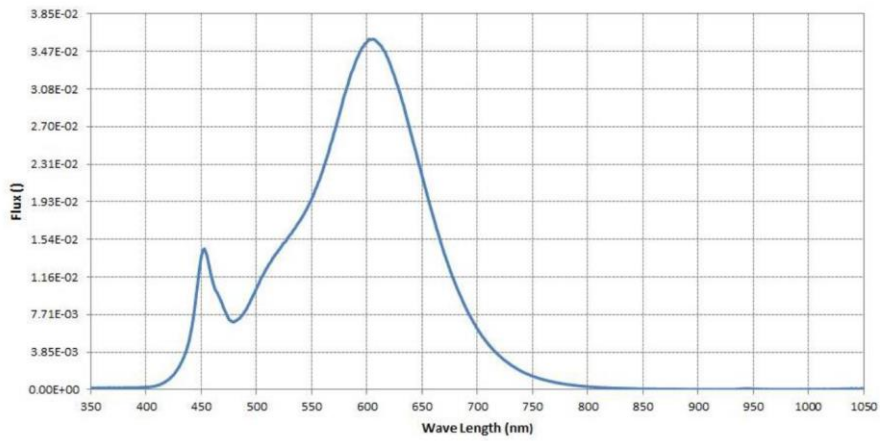

4.1 Integrating Sphere Test
 PLT-16-H-850-DIR

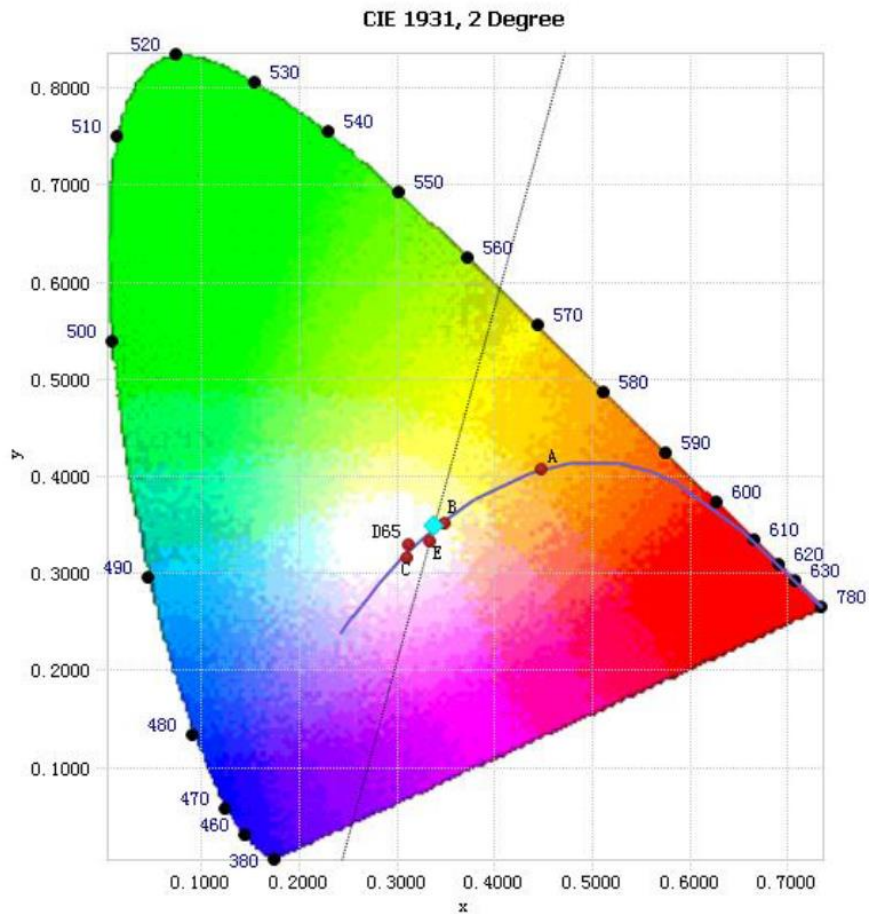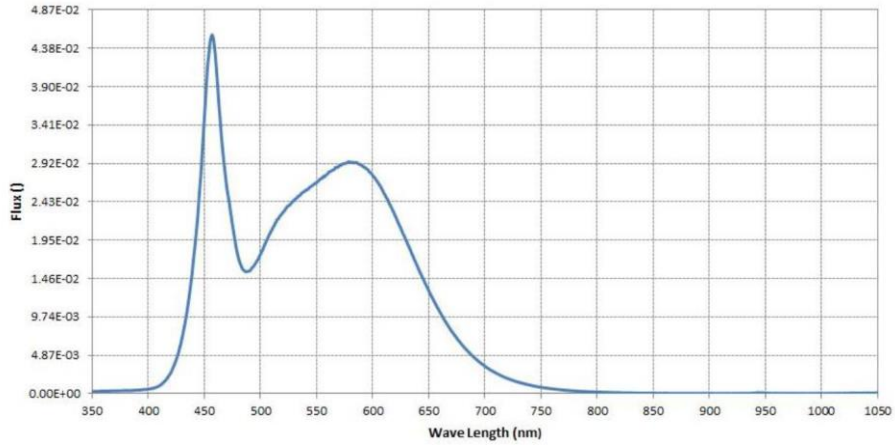

4.0 LM-79 Measurement and Test Results

4.3 Goniophotometer Test

Model No.	PLT-16-H-827-DIR	Sample ID.	J1-J2
Operate time (Min.)	90	Stabilization time (Min.)	45

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

Two lamps were placed in a reference housing during testing


Temperature ($^{\circ}\text{C}$)	Voltage (Vac)	Frequency (Hz)	Power (W)	Orientation
25.10	120.00	60	38.58	Light Down

Test Result

Flux(lm)	Zonal Lumen Requirement(0° - 60°)	SC (0° - 180°)	SC (90° - 270°)	Luminous Efficacy (lm/W)
2670	97.74%	1.16	1.23	69.2

4.3 Goniophotometer Test

Light Distrubtion Curve

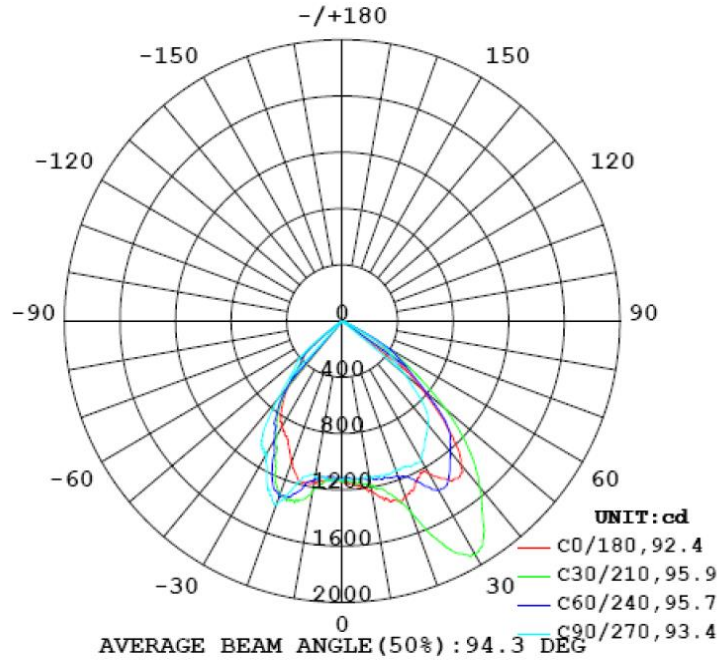

4.3 Goniophotometer Test

Zonal Lumen Summary

$\gamma(^{\circ})$	1 PLT-16-H-827-DIR 2 lamps in Lithonia 6HF 2/26DTT MVOLT	
	Lumens	% Total
0- 10	109.278	4.09%
10- 20	354.703	13.28%
20- 30	603.51	22.60%
30- 40	699.77	26.21%
40- 50	569.458	21.33%
50- 60	273.08	10.23%
60- 70	47.776	1.79%
70- 80	8.304	0.31%
80- 90	1.667	0.06%
90-100	0.079	0.00%
100-110	0.095	0.00%
110-120	0.186	0.01%
120-130	0.319	0.01%
130-140	0.455	0.02%
140-150	0.505	0.02%
150-160	0.438	0.02%
160-170	0.3	0.01%
170-180	0.114	0.00%
Total	2670.0	100%

5.0 THD and PF Test

Model No.	PLT-16-H-827-DIR	Sample ID.	J1
-----------	------------------	------------	----

Test Method

The samples were tested according to the ANSI C82.77:2002.

The total harmonic distortion shall be measured to the 40th order.

The ambient temperature condition was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Temperature (°C)	Voltage (Vac)	Frequency (Hz)	Power Factor	THD
25.1	120.00	60	0.999	3.83%
25.1	277.00	60	0.988	9.18%

6.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2018/12/26	2019/12/25
DLF108	Auxiliary Lamp	2018/12/26	2019/12/25
DLF122	Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-derectional	2018/12/26	2019/12/25
DLF116	AC Power Source	2018/12/26	2019/12/25
DLF113	Power Meter	2018/12/26	2019/12/25
DLF112	Temperature Recorder	2018/12/26	2019/12/25
DLF114	Temperature & Humidity Datalogger	2018/12/26	2019/12/25
DLF101	Goniophotometer	2018/12/26	2019/12/25
DLF125	Standard Lamp Standard Lamp Type: 76.58 V, 6.7875 A, Tungsten, Omni-derectional	2018/12/26	2019/12/25
DLF104	AC Power Source	2018/12/26	2019/12/25
DLF507	DC Power Source	2018/12/26	2019/12/25
DLF102	Power Meter	2018/12/26	2019/12/25
DLF111	Temperature & Humidity Datalogger	2018/12/26	2019/12/25
DLF119	Power Meter	2018/12/26	2019/12/25
DLF031	Temperature data logger	2018/12/26	2019/12/25
DLF022	Digital power meter	2018/12/26	2019/12/25
DLF003	Temperature & Humidity Datalogger	2018/12/26	2019/12/25

***** End of Test Report*****