



Color: Bronze

Weight: 143.3 lbs

Project:	Type:
Prepared By:	Date:

### Technical Specifications

#### Compliance

**CSA Listed:**

Suitable for wet locations

**Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

#### Performance

**Description:**

Steel pole 4" round 11 gauge 25 foot drilled two sides square base

#### Construction

**Shaft:**

46,000 p.s.i. minimum yield.

**Hand Holes:**

Reinforced with grounding lug and removable cover

**Base Plates:**

36,000 p.s.i. minimum yield.

**Color:**

Bronze powder coating

**Height:**

25 ft

**Gauge:**

11

**Wall Thickness:**

1/8"

**Shaft Size:**

4"

**Anchor Bolt:**

Anchor bolt kits are sold separately. Order [ABK4-11-BCK-R4](#) for anchor bolt kits.

**Anchor Bolt Templates:**

WARNING Template must be printed on 11" x 17" sheet for actual size. CHECK SCALE BEFORE USING. Templates shipped with anchor bolts and available [online](#).

**Max EPA's/Max Weights:**

70MPH 4.5 ft/400 lb.  
 80MPH 2.4 ft/310 lb.  
 90MPH 1.1 ft/200 lb.  
 100MPH 0.1 ft/120 lb

**Accessories:**


Base/Cap: [BCK-R4](#)  
 Anchor Bolts: [BOLT4/11](#)

#### Other

**Terms of Sale:**

Pole Terms of Sale is available [online](#).

**Dimensions**

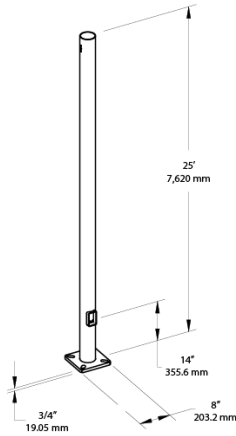

**Features**

- Designed for ground mounting
- Heavy duty TGIC polyester coating
- Reinforced hand holes with grounding lug and removable cover for easy wiring access
- Pole caps, base covers & bolts are sold separately
- Custom manufactured for each application

**Ordering Matrix**

Family	Shape	Size	Gauge	Height	Drilled/Welded Tenon
P	R	4	11	25	D2
	R = Round	4 = 4"	07 = 07	10 = 10'	D2 = Drilled
	TR = Tapered Round	5 = 5"	11 = 11	15 = 15'	WT = Welded Tenon
		6 = 6"		20 = 20'	
		7 = 7"		25 = 25'	
		8 = 8"		30 = 30'	