

Photometric Test Report

Relevant Standards

- ☒ IES LM-79-2008
- ☒ ANSI C82.77:2017

Prepared For

RAB Lighting Inc.

Room 6A33, No.1388, Wuzhong road, Shanghai, China

Xiao Xiang, 15921313292, Gary.Xiao@rabweb.com

Prepared By

Deliver Co., Ltd.

Block 11, 78 Keling Road, SSTP, Suzhou, China

0512-66801950, kevin.jia@szdeliver.com

Project Number

DLF2211103

Report Number

DLF2211103-16a

Test Date

2022/11/16

Issue Date

2022/11/17

Prepared By



Wangzun Zhu

Approved By



Kevin Jia

The results contained in this report pertain only to the tested sample.

This report shall not be reproduced, except in full, without written approval of Deliver Co., Ltd.

This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP.

1.0 Test Summary

DLC Technical Requirements v5.1

Indoor - Troffer - 2x4 Luminaires for Ambient Lighting of Interior Commercial Spaces				
Requirement Category	Test Method	Requirements		Test value
Luminaire Output (lm) (Goniophotometer - Section 4.2)	IES LM-79-2008	3000		3810
Minimum Luminaire Efficacy (lm/W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Standard 110	Premium 125	125.7
Power (Input Wattage) (W) (Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		30.3
Total Harmonic Distortion (A%) (THD & PF - section 4.3)	ANSI C82.77:2014	20.00%	120V	9.11%
		20.00%	277V	8.00%
Power Factor (THD & PF - section 4.3)	ANSI C82.77:2014	0.9	120V	0.994
		0.9	277V	0.983
Allowable CCTs* (K) (Integrating Sphere - Section 4.1)	IES LM-79-2008	7 step	3465±245	3456
		4 step	3465±124	
Minimum CRI (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥80		83
Minimum R9 (Integrating Sphere - Section 4.1)	IES LM-79-2008 CIE 13.3-1995	≥0		9
Minimum Rf (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥70		85
Minimum Rg (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	≥89		97
Minimum IES Rcs,h1 (Integrating Sphere - Section 4.1)	ANSI/IES TM-30-18	-12%≤IES Rcs,h1≤+23%		-12%
Zonal Lumen Requirement (0°-60°) (Goniophotometer - Section 4.2)	IES LM-79-2008	≥75%		76.47%
Corrected UGR (X=4H, Y=8H, 70/50/20%) (Goniophotometer - Section 4.2)	CIE 190-2010	<22		19.2
SC: 0-180° (Goniophotometer - Section 4.2)	IES LM-79-2008	1.0-2.0		1.34
SC: 90-270° (Goniophotometer - Section 4.2)	IES LM-79-2008	1.0-2.0		1.30
Input Voltage (V)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		120
(Goniophotometer - Section 4.2)		Non-Worst Case		277
Input Current (A)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		0.254
(Goniophotometer - Section 4.2)		Non-Worst Case		0.109
Power (Input Wattage - W)				
(Goniophotometer - Section 4.2)	IES LM-79-2008	Worst Case		30.3
(Goniophotometer - Section 4.2)		Non-Worst Case		29.7

2.0 Test List

Test Item	Test	Test Date	Model Number	Sample No.
1	Integrating Sphere Test	2022/11/16	T34FAHE2X4/30W/3500K	P1
2	Goniophotometer Test	2022/11/16	T34FAHE2X4/30W/3500K	P1
3	THD and PF Test	2022/11/16	T34FAHE2X4/30W/3500K	P1

Remark(If any)

- 1、 This report shall not be used by the client to claim product endorsement by NVLAP, NIST or any agency of the US government.
- 2、 The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products. This report does not imply that the product(s) has met the criteria for certification.

3.0 Production Description

Luminaire Description: T34FAHE2X4/30W/3500K

Electrical Specification: 120V-277V,50/60HZ

Photos of Luminaire Characteristics



4.0 LM-79 Measurement and Test Results

4.1 Integrating Sphere Test

Model No.	T34FAHE2X4/30W/350 0K	Sample ID.	P1
Operate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$.

The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ± 0.2 percent under load.

The sample was measured using 4π geometry and operated at rated voltage and was stabilized before measurement. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral radiant flux measurements taken at 1 nm intervals over the range of 380 to 780 nm.

Test Result

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
120.01	60	0.250	29.8	0.994
276.95	60	0.108	29.5	0.983


Test Result

CCT (K)	CRI	R9	Duv
3456	83	9	0.00012

Rf	Rg	IES Rcs,h1
85	97	-12%

4.1 Integrating Sphere Test

Results

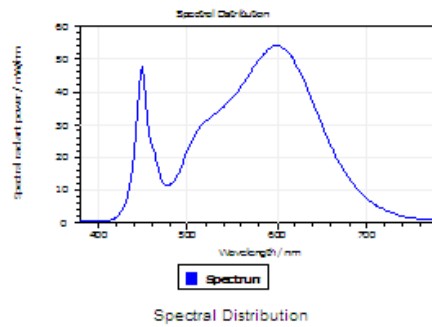


Spectral values

DominantWavelength 580.99 nm
Purity 0.402
PeakWavelength 599.36 nm
Radiant Power 8.753 W
Width50%:

1

Color Coordinates

Correlated Color Temperat 3456 K
x: 0.4080 u: 0.2368 u': 0.2368
y: 0.3923 v: 0.3415 v': 0.5123
CRI01 81.3 CRI09 8.9
CRI02 89.6 CRI10 76.0
CRI03 96.0 CRI11 82.0
CRI04 82.3 CRI12 66.7
CRI05 81.7 CRI13 83.2
CRI06 86.6 CRI14 98.0
CRI07 84.8 CRI15 74.3
CRI08 62.5 CRI16 72.4
ResultsCRI 83.1



PlandDistance 1.2E-004

4.1 Integrating Sphere Test







IES TM-30-18 Color Rendition Report

Source: DLF2211103-16a

Manufacturer: RAB Lighting Inc.

Date: 2022/11/16

Model: T34FAHE2X4/30W/3500K

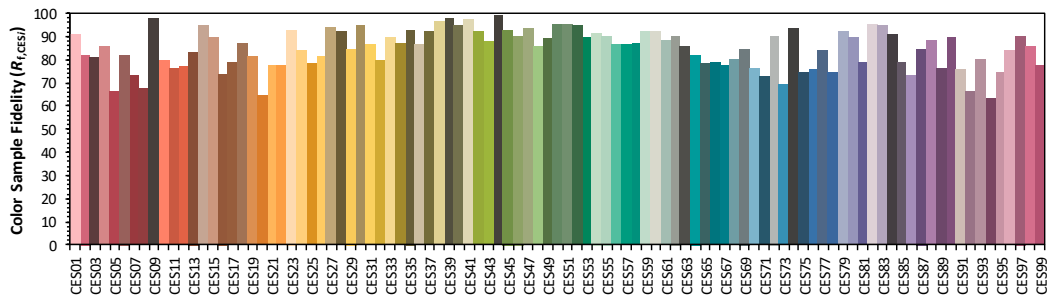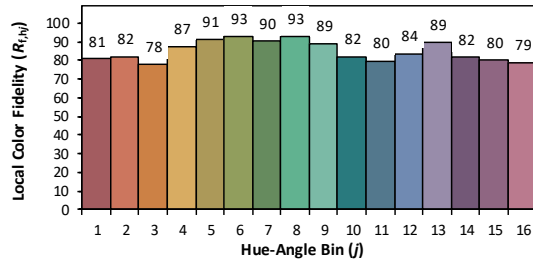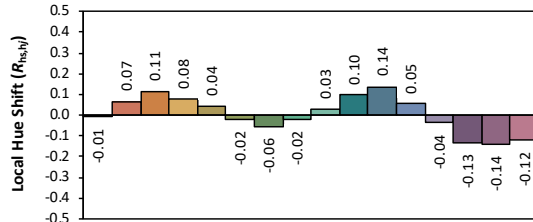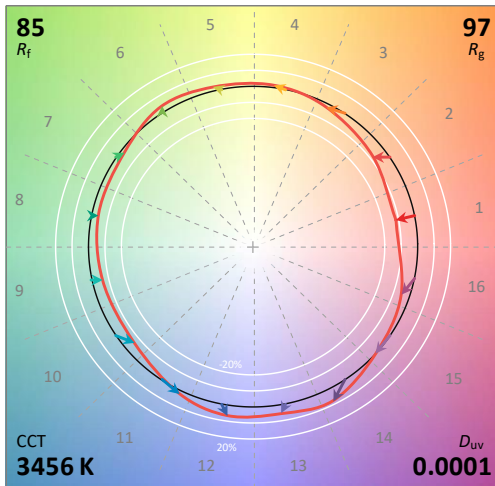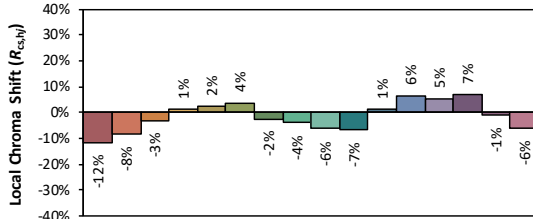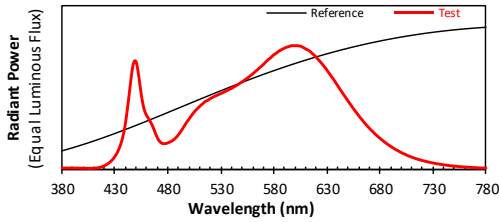

Notes: This is a recommended method for displaying IES TM-30-18 information.

x 0.4080
 y 0.3923
 u' 0.2368
 v' 0.5123

CIE 13.3-1995
(CRI)

R_a 84
 R_g 14

4.0 LM-79 Measurement and Test Results

4.2 Goniophotometer Test

Model No.	T34FAHE2X4/30W/3 500K	Sample ID.	P1
Opreate time (Min.)	90	Stabilization time (Min.)	45
Temperature (°C)	25.3	Humidity (%RH)	54.0

Test Method

The samples were tested according to the IES LM-79-2008.

Photometric paramters were measured using a type C goniophotometer and software.

The ambient temperature shall be maintained at 25° C ± 1° C, measured at a point not more than 1 m from the sample and at the same height as the sample.

The voltage of an AC power supply (RMS voltage) or DC power supply (instantaneous voltage) applied to the device under test shall be regulated to within ±0.2 percent under load.

The samples were operated at rated voltage and was stabilized before measurement. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 0.5° vertical intervals and 10° horizontal intervals.

Test Conditions

Condition	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
WROST CASE	120.04	60	0.254	30.3	0.993
NON-WROST CASE	277.00	60	0.109	29.7	0.982


Test Result

Flux (lm)	Field Angle(10%)		Beam Angle(50%)		Luminous Efficacy (lm/W)
	C0-180	C90-270	C0-180	C90-270	
3810	164.8	166.1	116.5	124.5	125.7


Zonal Lumen Requirement (0°-60°)	UGR (X=4H, Y=8H, 70/50/20%)	SC: 0-180°	SC: 90-270°
76.47%	19.2	1.34	1.30

4.2 Goniophotometer Test

Light Distrubtion Curve

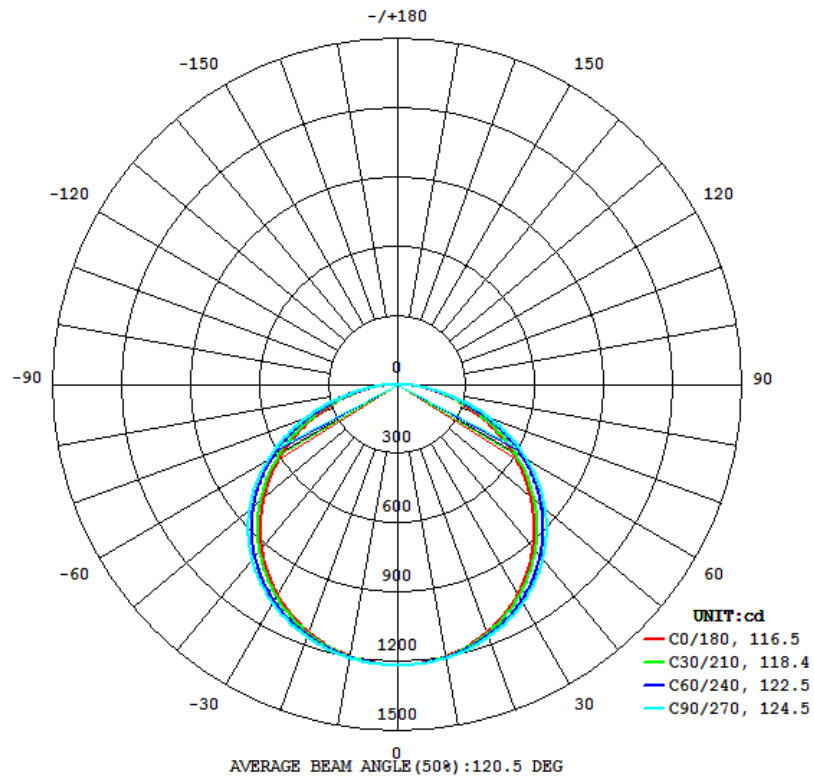

Isolux Plot

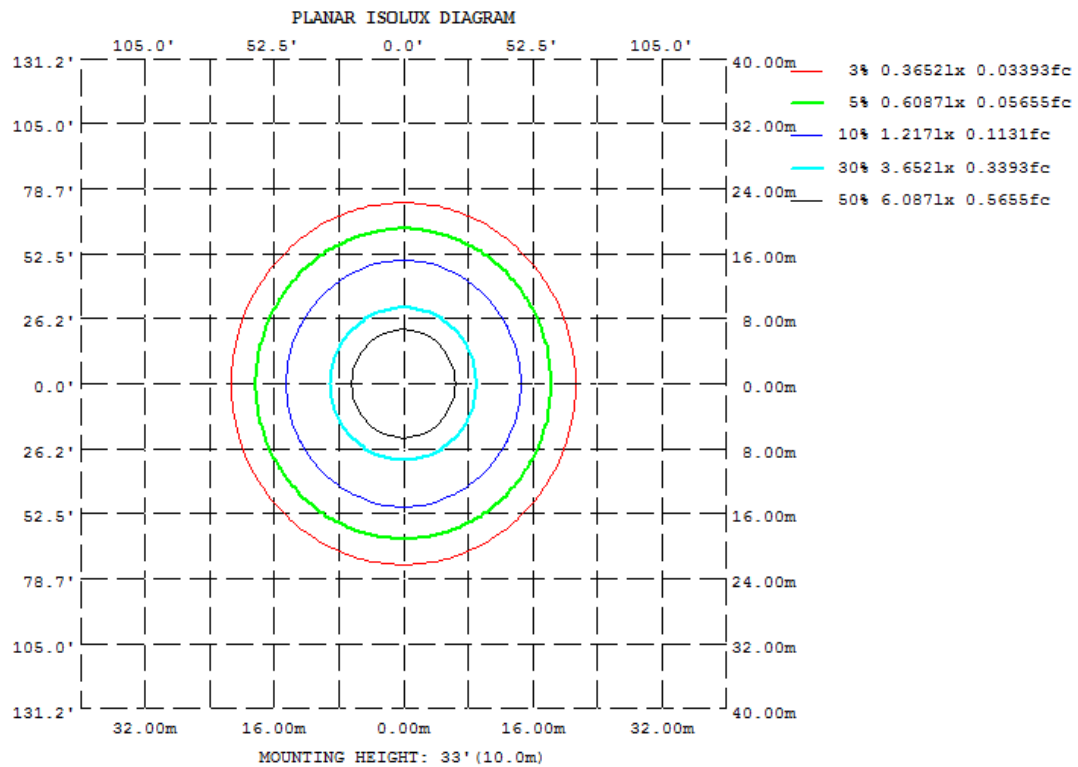

4.2 Goniophotometer Test

Zonal Lumen Summary

γ	C0	C45	C90	C135	C180	C225	C270	C315
10	1197	1200	1203	1200	1197	1200	1203	1200
20	1140	1151	1162	1151	1140	1151	1162	1151
30	1048	1070	1092	1070	1048	1070	1092	1070
40	921.0	953.0	986.9	953.0	921.0	953.0	986.9	953.0
50	760.4	800.0	842.4	800.0	760.4	800.0	842.4	800.0
60	572.8	612.3	655.5	612.3	572.8	612.3	655.5	612.3
70	368.3	398.1	430.1	398.1	368.3	398.1	430.1	398.1
80	166.6	179.9	189.5	179.9	166.6	179.9	189.5	179.9
90	0	0	0	0	0	0	0	0
100	0	0	0	0	0	0	0	0
110	0	0	0	0	0	0	0	0
120	0	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0
150	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0
DEG	LUMINOUS INTENSITY:cd							

UGR Table - Corrected

UGR Table - Corrected

Reflectances

Ceiling Cavity	70	70	50	50	30	70	70	50	50	30
Walls	50	30	50	30	30	50	30	50	30	30
Floor Cavity	20	20	20	20	20	20	20	20	20	20

Room Size

		UGR Viewed Crosswise					UGR Viewed Endwise				
X=2H	Y=2H	14.5	16.1	14.8	16.5	16.8	13.8	15.5	14.1	15.8	16.1
	3H	16.5	18.0	16.9	18.3	18.7	15.7	17.2	16.0	17.5	17.9
	4H	17.2	18.7	17.6	19.0	19.4	16.4	17.8	16.8	18.2	18.6
	6H	17.8	19.2	18.2	19.5	19.9	17.0	18.3	17.4	18.7	19.1
	8H	18.0	19.3	18.4	19.7	20.1	17.1	18.4	17.6	18.8	19.2
	12H	18.1	19.4	18.6	19.7	20.2	17.3	18.5	17.7	18.9	19.3
4H	2H	15.1	16.5	15.5	16.9	17.2	14.5	16.0	14.9	16.3	16.7
	3H	17.3	18.5	17.7	18.9	19.3	16.7	17.9	17.1	18.3	18.7
	4H	18.2	19.3	18.7	19.7	20.2	17.5	18.6	17.9	19.0	19.5
	6H	18.9	19.9	19.4	20.4	20.8	18.2	19.2	18.6	19.6	20.1
	8H	19.2	20.1	19.7	20.5	21.0	18.5	19.4	18.9	19.8	20.3
	12H	19.4	20.2	19.9	20.7	21.1	18.6	19.4	19.1	19.9	20.4
8H	4H	18.6	19.4	19.0	19.9	20.4	17.9	18.8	18.4	19.3	19.7
	6H	19.4	20.2	19.9	20.6	21.1	18.8	19.5	19.2	20.0	20.5
	8H	19.7	20.4	20.2	20.9	21.4	19.1	19.7	19.6	20.2	20.7
	12H	20.0	20.6	20.5	21.1	21.6	19.3	19.9	19.8	20.4	21.0
12H	4H	18.6	19.4	19.1	19.9	20.3	18.0	18.8	18.5	19.3	19.7
	6H	19.5	20.2	20.0	20.6	21.1	18.8	19.5	19.4	20.0	20.5
	8H	19.8	20.4	20.3	20.9	21.5	19.2	19.8	19.7	20.3	20.9

Maximum UGR = 21.6

4.2 Goniophotometer Test

ZONAL LUMEN SUMMARY

	Zonal (lm)		Total (lm)	Percent
0-10	115.29	0 - 10	115.29	3.03%
10-20	333.25	0 - 20	448.54	11.77%
20-30	514.13	0 - 30	962.67	25.27%
30-40	635.72	0 - 40	1598.39	41.96%
40-50	679.82	0 - 50	2278.21	59.80%
50-60	635.14	0 - 60	2913.35	76.47%
60-70	502.50	0 - 70	3415.85	89.66%
70-80	303.51	0 - 80	3719.36	97.63%
80-90	90.23	0 - 90	3809.59	100.00%
90-100	0.00	0 - 100	3809.59	100.00%
100-110	0.00	0 - 110	3809.59	100.00%
110-120	0.00	0 - 120	3809.59	100.00%
120-130	0.00	0 - 130	3809.59	100.00%
130-140	0.00	0 - 140	3809.59	100.00%
140-150	0.00	0 - 150	3809.59	100.00%
150-160	0.00	0 - 160	3809.59	100.00%
160-170	0.00	0 - 170	3809.59	100.00%
170-180	0.00	0 - 180	3809.59	100.00%

4.2 Goniophotometer Test


COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	108	103	99	95	105	101	97	93	97	93	90	93	90	87	89	87	85	83
2	98	89	82	76	95	87	81	75	84	78	74	81	76	72	77	74	70	68
3	89	78	70	63	86	76	69	62	73	67	61	71	65	60	68	63	59	57
4	81	69	60	53	79	68	59	52	65	58	52	63	56	51	60	55	50	48
5	75	61	52	45	72	60	51	45	58	50	44	56	49	44	54	48	43	41
6	69	55	46	39	67	54	45	39	52	45	39	51	44	38	49	43	38	36
7	64	50	41	35	62	49	40	34	47	40	34	46	39	34	45	38	34	32
8	59	45	37	31	58	45	36	31	43	36	30	42	35	30	41	35	30	28
9	55	42	33	28	54	41	33	27	40	32	27	39	32	27	38	32	27	25
10	52	38	30	25	50	38	30	25	37	30	25	36	29	25	35	29	24	23

CONE OF LIGHT DIAGRAM

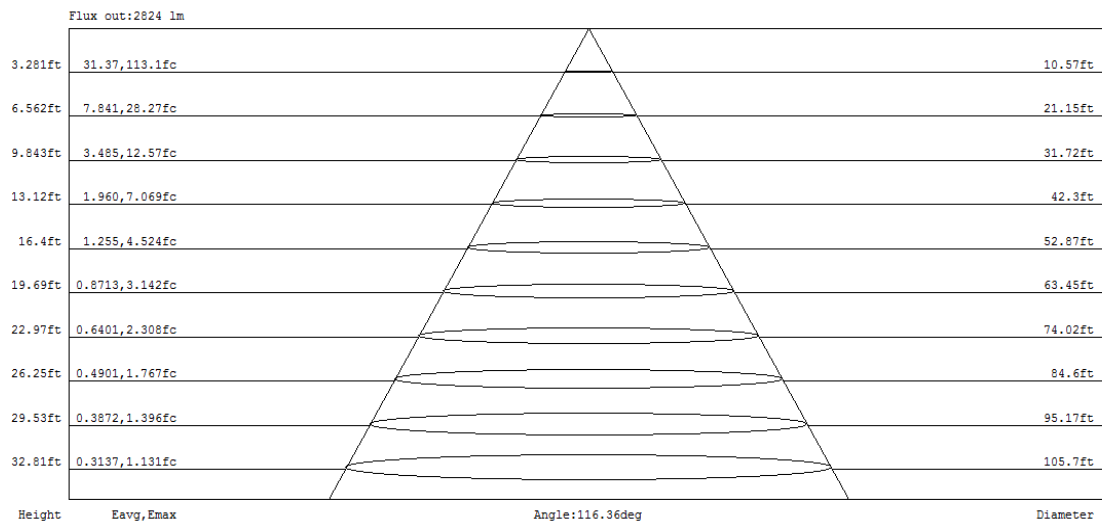

4.0 LM-79 Measurement and Test Results

4.3 THD and PF Test

Model No.	T34FAHE2X4/30W/3 500K	Sample ID.	P1
Temperature (°C)	25.3	Humidity (%RH)	56.0

Test Method

The samples were tested according to the ANSI C82.77:2002.

The total harmonic distortion shall be measured to the 40th order.

The ambient temperature condition was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample measurements were made using a digital power meter and power supply. The sample was operated at rated voltage and was stabilized before measurement. The total harmonic distortion were calculated.

Test Results

Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor	THD
120.01	60	0.250	29.8	0.994	9.11%
276.95	60	0.108	29.5	0.983	8.00%

5.0 Equipment Information

Test Equipment			
Equipment ID	Equipment Name	Last Calibration Date	Calibration Due Date
DLF107	Integrating Sphere System	2021/12/26	2022/12/25
DLF108	Auxiliary Lamp	2021/12/26	2022/12/25
DLF122	Measurement Standard Lamp Standard Lamp Type: 220 V, 0.4720 A, Tungsten, Omni-derectional	2021/12/26	2022/12/25
DLF116	AC Power Source	2021/12/26	2022/12/25
DLF113	Power Meter	2021/12/26	2022/12/25
DLF112	Temperature Recorder	2021/12/26	2022/12/25
DLF114	Temperature & Humidity Datalogger	2021/12/26	2022/12/25
DLF101	Goniophotometer	2021/12/26	2022/12/25
DLF125	Standard Lamp Standard Lamp Type: 76.58 V, 6.7875 A, Tungsten, Omni-derectional	2021/12/26	2022/12/25
DLF104	AC Power Source	2021/12/26	2022/12/25
DLF507	DC Power Source	2021/12/26	2022/12/25
DLF102	Power Meter	2021/12/26	2022/12/25
DLF111	Temperature & Humidity Datalogger	2021/12/26	2022/12/25
DLF119	Power Meter	2021/12/26	2022/12/25
DLF031	Temperature data logger	2021/12/26	2022/12/25
DLF022	Digital power meter	2021/12/26	2022/12/25
DLF003	Temperature & Humidity Datalogger	2021/12/26	2022/12/25

***** End of Test Report*****